
accuc@ld

ARS8PV

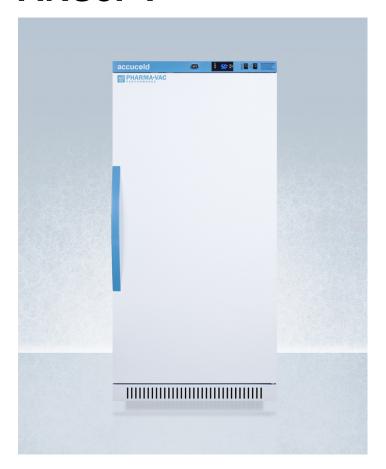

50" x 23.38" x 24.38" (H x W x D)

Performance series Pharma-Vac 8 cu.ft. upright allrefrigerator for vaccine storage with an antimicrobial silverion handle and hospital grade cord with 'green dot' plug

Highlights:

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a separate temperature probe for continuous product readout to simulate stored product temperature

Powder-coated handle with naturally occurring silver ions to help reduce germ spread

Product Features:

Purpose-built design	Designed and purpose-built for pharmacy, medication, and vaccine applications to support meeting CDC/VFC/VFA guidelines	
+/-1°C Variation	The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period	
Adjustable temperature	Intuitive controls let you adjust the interior temperature between +2 to +8°C	
Antimicrobial silver ion-coated handle	Powder-coated handle with naturally occurring silver ions to help reduce germ spread	
Temperature alarm	Visual and audible alarms alert if the interior temperature rises or falls out of set range	
Remote alarm contacts	Electronic controller is equipped with a volt-free contact for alarm forwarding to an external remote system (contacts located in the external rear of the unit)	
Automatic defrost with adjustable cycle defrost	Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup	
Access port	Includes a pre-installed 1/2" probe hole in the right interior wall to allow easier connection to user-provided monitoring equipment	
pen door alarm Alarm will sound if the door is left ajar for over 4 minutes (adjustable from 1-99 minutes		

accuc@ld

ARS8PV Specifications:

Overview		
Nominal Height	50.0" (127 cm)	
Height of Cabinet	50.0" (127 cm)	
Nominal Width	24.0" (61 cm)	
Width	23.38" (59 cm)	
Width with Door Open	23.88" (61 cm)	
Nominal Depth	25.0" (64 cm)	
Depth	24.38" (62 cm)	
Depth with Handle	26.13" (66 cm)	
Depth with door at 90°	46.5" (118 cm)	
Capacity	8.0 cu.ft. (227 L)	
Defrost Type	Automatic	
Door	White	
Cabinet	White	
US Electrical Safety	ETL	
Canadian Electrical Safety	ETL-C	
Amps	1.4	
Voltage/Frequency	115 V AC/60 Hz	
Weight	161.0 lbs. (73 kg)	
Parts & Labor Warranty	2 Years	
Compressor Warranty	5 Years	
UPC	761101062570	
Refrigerator Features		
Refrigerator Features		
Door Swing	RHD	
	RHD Yes	
Door Swing		
Door Swing Reversible	Yes	
Door Swing Reversible Shelf Type	Yes Wire	
Door Swing Reversible Shelf Type Shelf Qty	Yes Wire 7	
Door Swing Reversible Shelf Type Shelf Qty Adjustable Shelves	Yes Wire 7 Yes	
Door Swing Reversible Shelf Type Shelf Qty Adjustable Shelves Thermostat Type	Yes Wire 7 Yes Digital	
Door Swing Reversible Shelf Type Shelf Qty Adjustable Shelves Thermostat Type Fan Type	Yes Wire 7 Yes Digital Interior	
Door Swing Reversible Shelf Type Shelf Qty Adjustable Shelves Thermostat Type Fan Type Refrigerant Type	Yes Wire 7 Yes Digital Interior R600a	
Door Swing Reversible Shelf Type Shelf Qty Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount	Yes Wire 7 Yes Digital Interior R600a 1.73oz.	
Door Swing Reversible Shelf Type Shelf Qty Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount Interior Light	Yes Wire 7 Yes Digital Interior R600a 1.73oz. Yes	
Door Swing Reversible Shelf Type Shelf Qty Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount Interior Light Temperature Range	Yes Wire 7 Yes Digital Interior R600a 1.73oz. Yes	
Door Swing Reversible Shelf Type Shelf Qty Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount Interior Light Temperature Range Dimensions	Yes Wire 7 Yes Digital Interior R600a 1.73oz. Yes 2 to 8°C	

-	Compressor Step Height	6.5" (17 cm)
	Compressor Step Width	20.0" (51 cm)
	Compressor Step Depth	5.0" (13 cm)

