


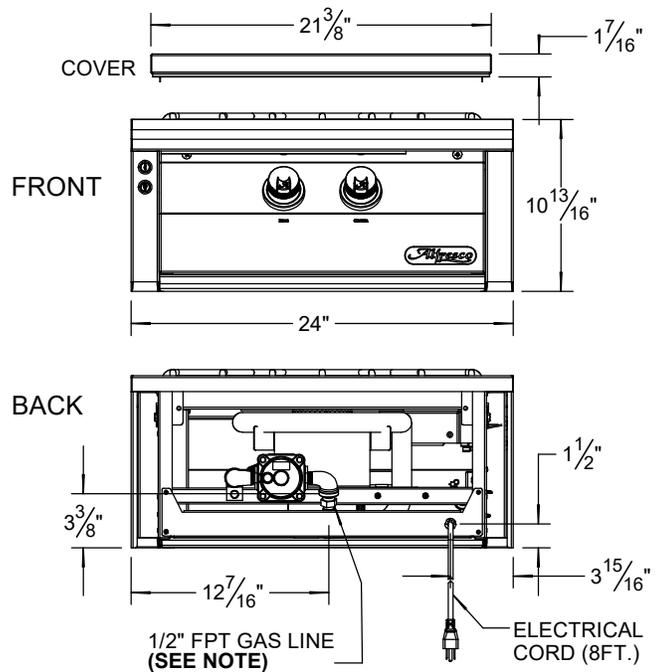


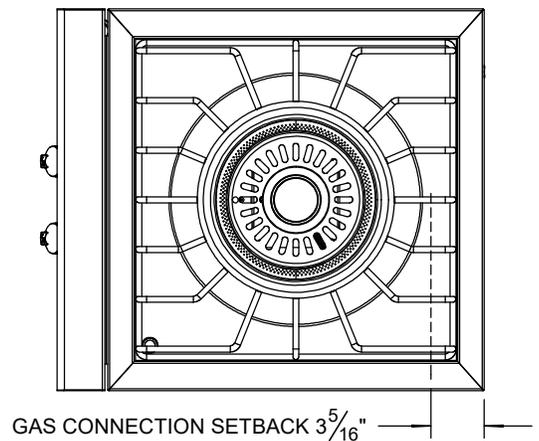

**AXEVP TYPICAL INSTALLATION**

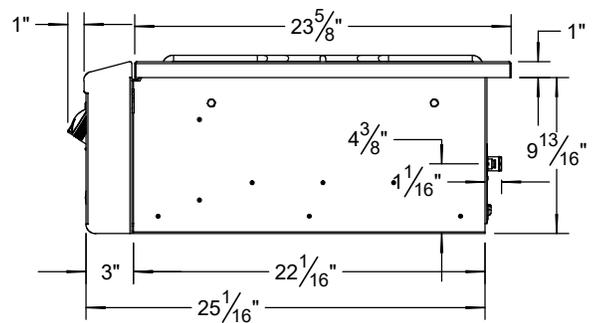

**COUNTERTOP CUTOUT REQUIREMENTS**

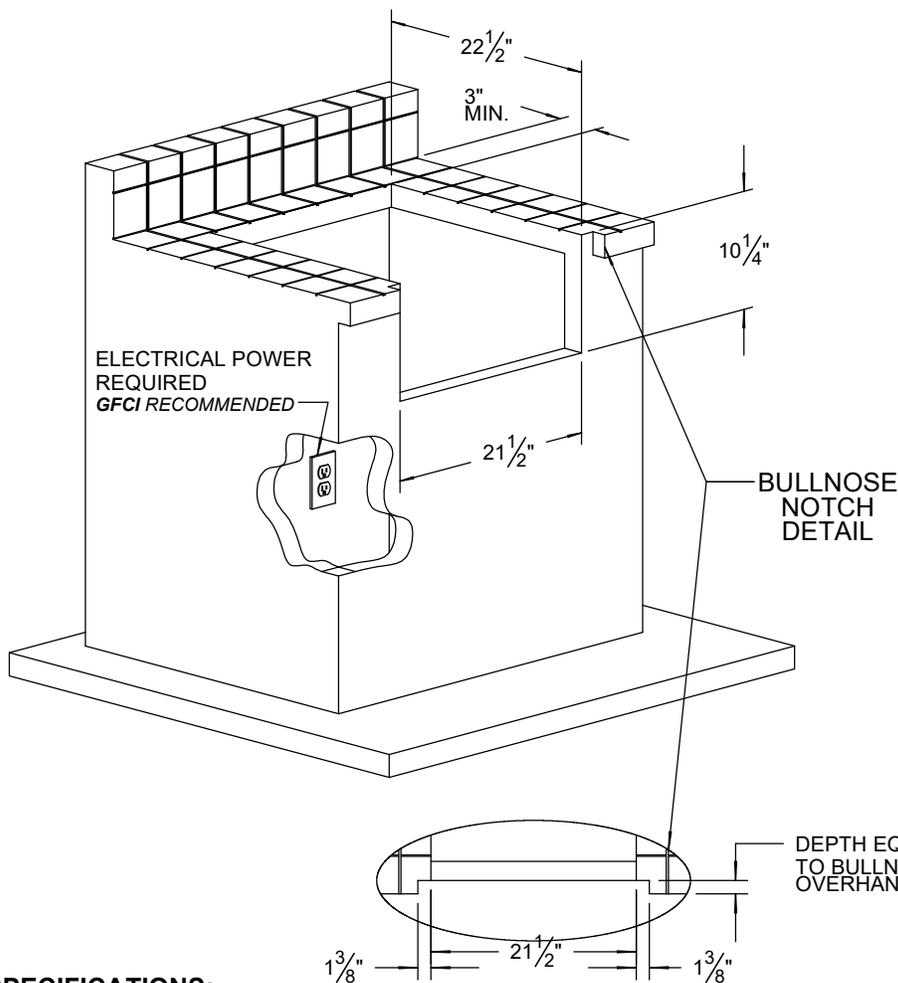

**LP GAS SETUP:**

ADAPTER: 1/2" MPT X 3/8" MPT

REGULATOR WITH 36" HOSE

**NOTE:**  
STANDARD UNIT HAS A NATURAL GAS (NG) CONNECTION WITH 1/2" NPT FITTING.  
IF LIQUID PROPANE (LP) OPTION IS ORDERED THE UNIT IS SUPPLIED WITH A REGULATOR, HOSE AND ADAPTER FITTING AS SHOWN.

**SPECIFICATIONS:**

MAX. COMBINED BTUH = 65,000  
 FUEL = NG @ 5" W.C. OR LP @ 10 W.C.  
 ELECTRICAL POWER = 115 VAC - 50/60 Hz. - 0.1 A  
 GAS CONNECTION = 1/2" NPT (NG) OR 3/8" ODF (LP)




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUPERIOR EQUIPMENT SOLUTIONS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION FROM SUPERIOR EQUIPMENT SOLUTIONS, INC. IS PROHIBITED.

**DRAWN BY: ADRIAN CRISCI**  
**CREATED: 04/30/2018 11:03 AM**


PROJECT TITLE:  
**AXEVP**

DRAWING TITLE:  
**AXEVP (REV-A) SPECIFICATION SHEET (SN° 18-00000 & FORWARD)**

DRAWING NO.: **AXEVP - SPEC SHEET (REV-A)**  
 SHEET 1 OF 2

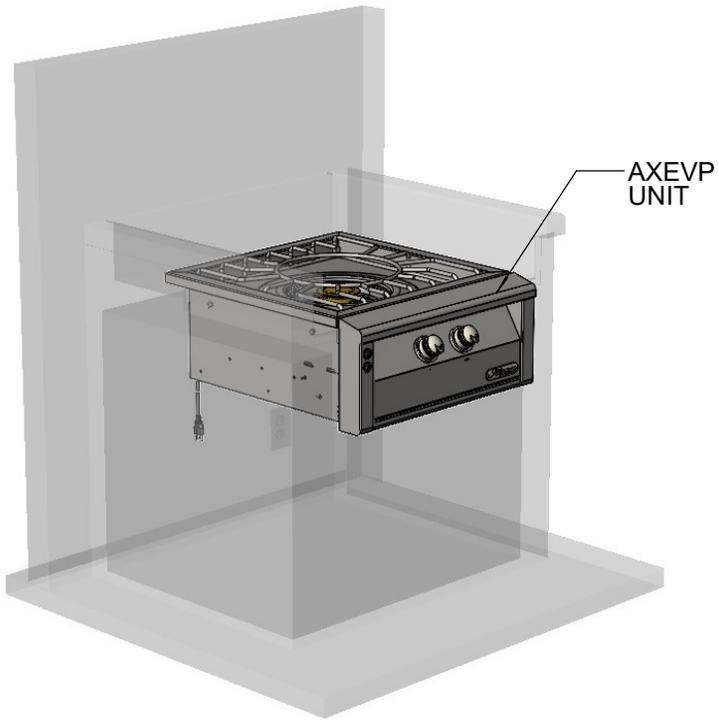


**AXEVP 6" RECESSED DOWN INSTALLATION**

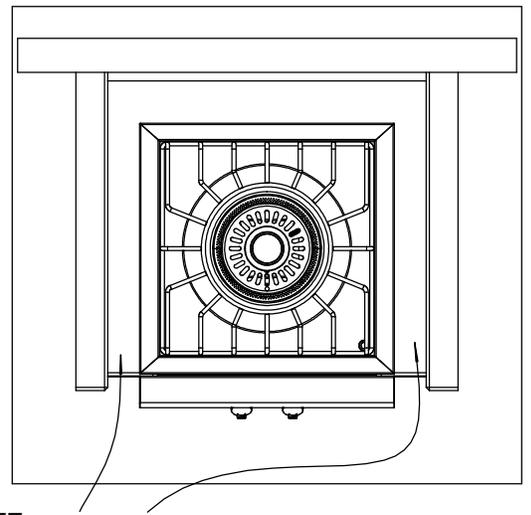

NOTE:  
3" MINIMUM  
CLEARANCE  
ALL AROUND  
PERIMETER OF  
THE UNIT

**COUNTERTOP CUTOUT REQUIREMENTS**

NOTE:  
THE AXEVP-TG  
(TEPPANYAKI GRIDDLE)  
CANNOT BE USED WITH  
THE RECESSED DOWN  
INSTALLATION

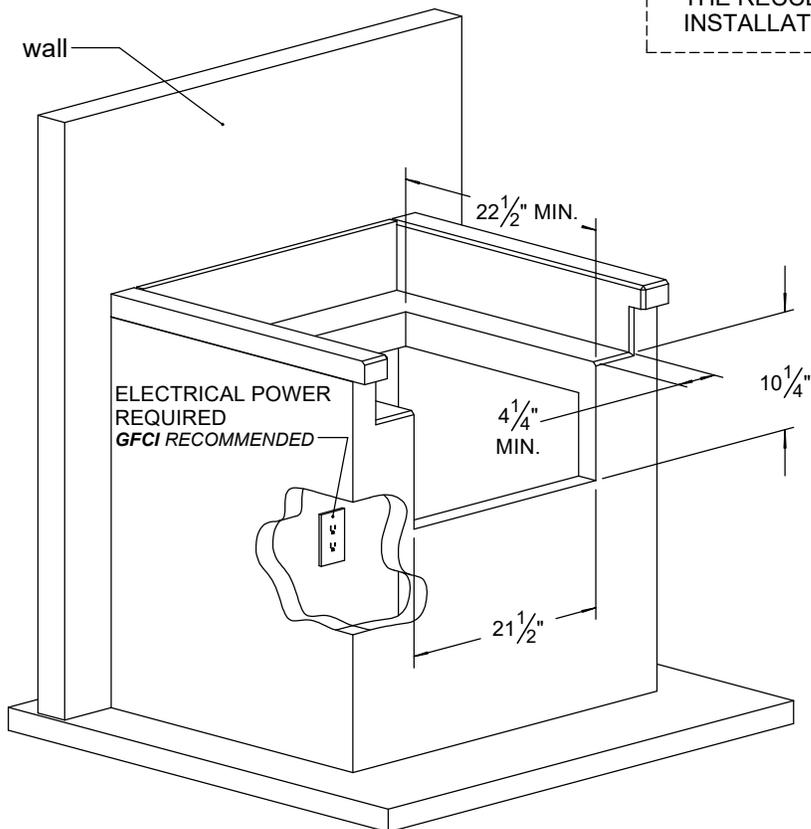

NOTE:  
TYPICAL RECESSED DOWN IS 6"  
MAY BE DIFFERENT TO SUIT CUSTOMER PREFERENCE.

