

KEY FEATURES

9.0 cu.ft. Front Load Gas Dryer  
 TrueSteam® Technology  
 Electronic Control Panel with LCD Display  
 Steam Sanitary™  
 Steamfresh™  
 ThinQ®



Control Panel



ThinQ App

PRODUCT FEATURES

<b>SUMMARY</b>		<b>SMART FEATURES (THINQ® TECHNOLOGY)</b>	
Type	Front Load Dryer	Smart Diagnosis (v3.0)	Yes
Vent Type	Vented	Wi-Fi	Yes
Dryer Type	Gas	NFC Tag On Technology	No
Capacity	9.0 cu. ft.	ThinQ Care (Remote Start/Cycle Monitor)	Yes
Matching Washer	WM9700HPA	Energy Monitoring	Yes (WiFi)
Sensor Dry	Yes	<b>ENERGY</b>	
Steam	Yes	ENERGY STAR® Certified	Yes
Colors	Platinum Steel(P)	CEF	3.49
<b>APPEARANCE</b>		<b>MATERIALS AND FINISHES</b>	
Control & Display	Electronic Control Panel with LCD Display	Aluminized Alloy Steel Drum	No
Hard Buttons	No	NeveRust® Stainless Steel Drum	Yes
Touch Buttons	Yes	Cabinet	VCM
Dial-A-Cycle®	No	Door	Tempered Glass Door
<b>DRYER PROGRAMS</b>		All Available Colors	Platinum Steel(P)
No. of Programs	26	<b>POWER SOURCE</b>	
Programs	Normal, AI Dry, Bedding, Delicates, Quick Dry, Timed Dry, Perm. Press, SteamFresh™, Heavy Duty, Towels, Air Dry, Pet Care, SteamSanitary™, Power Dry, Low Temp Dry, Super Dry, Activewear, Jeans, Blanket Refresh, Easy Ironing, Small Load, Large Load, XL Load, Wrinkle Prevention, Overnight Dry, Rack Dry	Ratings	CSA Listed
No. of Options	16	Electrical Requirements	120V, 13 Amps
Options	Wi-Fi, Remote Start, Drum Light, Control Lock, Cycle List Edit, Signal, Language, Cycle Optimization, Smart Diagnosis, Factory Reset, TurboSteam®, Wrinkle Care, Damp Signal, Energy Saver, Low Static, Delay	Type	Gas
Temperature Settings	High / Med. High / Medium / Med. Low / Low	BTU Rating	20,000
Drying Levels	Very / More / Normal / Less / Damp	<b>OPTIONS</b>	
Manual Dry Times	10-100min (Each 5min.), Dry Time	LP Conversion Kit	383EEL3002D // LPK1
<b>FABRIC CARE FEATURES</b>		Side Venting Kit	383EEL9001L
AI Sensor Dry	Yes	Drying Rack	AHB73109002
Sensor Dry	Yes	Pedestal	WDP5K
Precise Temperature Control with Variable Heater	Yes	Pedestal (WxHxD)	29 x 13 5/8" x 29 1/2" (45 9/16" D with door open)
Precise Temperature Control with Variable Compressor	No	<b>DIMENSIONS</b>	
Steam	TurboSteam®	Product (WxHxD)	29" x 40 7/8" x 31 1/2"
<b>CONVENIENCE FEATURE</b>		Depth with Door Open	53" 3/8
3 Minute Installation Check	Yes	Carton (WxHxD)	30 15/16" x 44 11/16" x 33 3/16"
End of Cycle Signal	Yes	Weight (Product)	147.9 lbs
Drum Light (door open)	Yes	Weight (Carton)	160.9 lbs
Reversible Door	Yes	<b>WARRANTY</b>	
FlowSense® Duct Clogging Indicator	Yes	Parts & Labor	2 years
Wrinkle Care Option	Yes	Drum	3 years
Control Lock	Yes	<b>UPC CODE</b>	
Venting Option	3 Way Venting	DLGX9701P	048231350280
4 Adjustable Legs	Yes		
Remaining Time Display/Status Indicator(s)	Yes		

# DLGX9701P



LG SIGNATURE Front Load Gas Dryer

## QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.


### DIMENSIONS / CLEARANCES

Installation Spacing for Recessed Area or Closet Installation

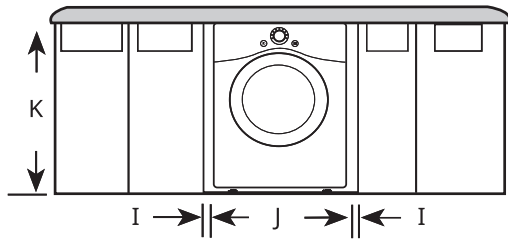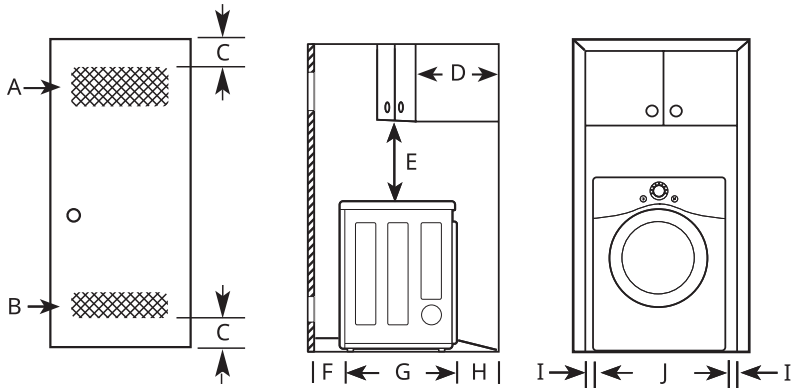

DESCRIPTION	DIMENSIONS / CLEARANCE
A	Upper Ventilation Opening $\geq 48$ sq. in. (310 cm <sup>2</sup> )
B	Lower Ventilation Opening $\geq 24$ sq. in. (155 cm <sup>2</sup> )
C	Distance to Ventilation Opening $\geq 3"$ (76 mm)
D	Overhead Cabinet Depth $\leq 14"$ (356 mm)
E	Distance to the Overhead Cabinet/ Shelf $\geq 18"$ (457 mm)
F	Front Clearance 1" (25 mm)
G	Depth 31 1/2" (800 mm)
H	Back Clearance $\geq 5"$ (127 mm)
I	Side Clearance $\geq 1"$ (25 mm)
J	Width 29" (737 mm)
K	Height of Cabinet Opening 40 7/8" (1037 mm)


### INSTALLATION SPACING

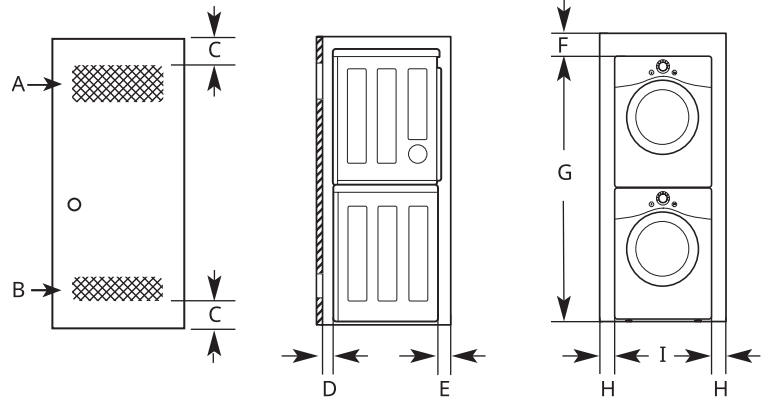

DESCRIPTION	DIMENSIONS / CLEARANCE
A	Upper Ventilation Opening $\geq 48$ sq. in. (310 cm <sup>2</sup> )
B	Lower Ventilation Opening $\geq 24$ sq. in. (155 cm <sup>2</sup> )
C	Distance to Ventilation Opening $\geq 3"$ (76 mm)
D	Front Clearance $\geq 1"$ (25 mm)
E	Back Clearance $\geq 5 1/2"$ (140 mm)
F	Top Clearance to the Ceiling $\geq 6"$ (152 mm)
G	Height to the Top of Stacked Appliances † 81 3/4" (2074 mm)
H	Side Clearance $\geq 1"$ (25 mm)
I	Width † 29" (737 mm)

† Differs depending on the washer dimensions.

### INSTALLATION SPACING

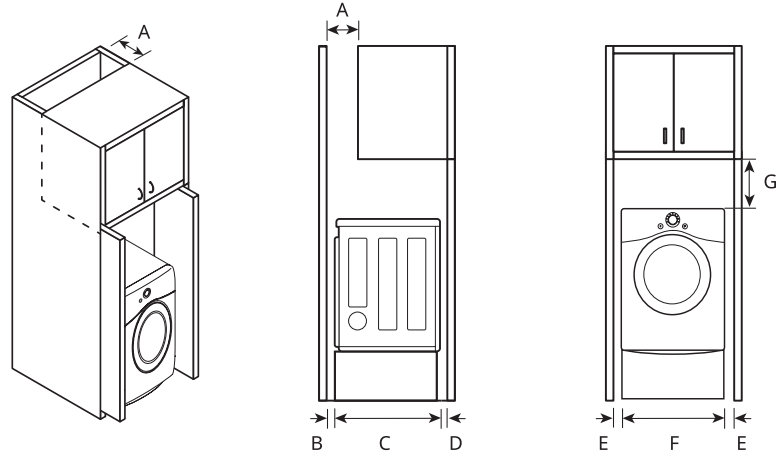

DESCRIPTION	DIMENSIONS / CLEARANCE
A	Depth of Ventilation Opening $\geq 7"$ (178 mm)
B	Back Clearance $\geq 5"$ (127 mm)
C	Depth 31 1/2" (800 mm)
D	Front Clearance $\geq 1"$ (25 mm)
E	Side Clearance $\geq 1"$ (25 mm)
F	Width 29" (737 mm)
G	Clearance to Top of Cabinet $\geq 9"$ (229 mm)