

Oristano



Wall mount hood

Specification sheet



Learn more

MEASUREMENTS

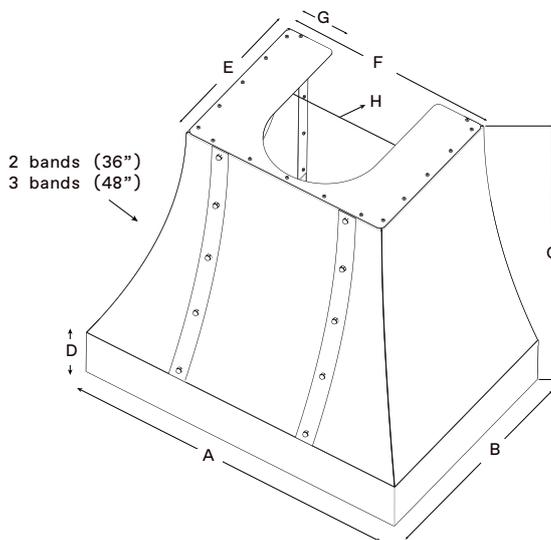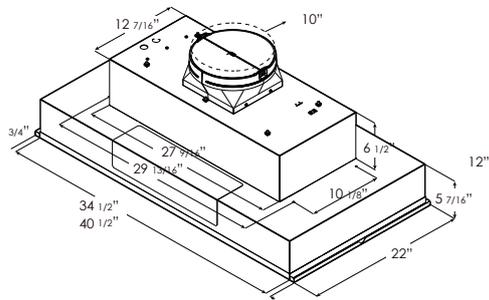

	EORX36SS	EORX48SS
A	36 ³ / ₁₆ " (91.9 cm)	48" (122.1 cm)
B	24 ⁵ / ₁₆ " (61.7 cm)	24 ³ / ₁₆ " (61.5 cm)
C	30" (76.2 cm)	
D	5 ¹ / ₂ " (14 cm)	5 ³ / ₄ " (14 cm)
E	17 ⁵ / ₁₆ " (44 cm)	17 ⁵ / ₁₆ " (44 cm)
F	22" (57.8 cm)	22" (57.8 cm)
G	5 ³ / ₈ " (13.7 cm)	9 ¹ / ₂ " (24.2 cm)
H	12" (30.6 cm)	12" (30.4 cm)

DESCRIPTION

Inspired by the traditional architecture, glistening warm waters, and the relaxed pace of Oristano, the capital city of Sardinia Italy, Oristano has a tapered shape, seamless flow, mirrored stainless front rim, and decorative banding & rivets that deliver a statement and complement even the most exquisite kitchens.

Designed to support those with a passion for food & gourmet cooking, Oristano can be equipped with 600 or 1200 CFM blowers, soft LED lighting, plus Elica's patented HUSH sound suppression system will keep the conversation going. Available in 36" and 48" widths, and built with Italian craftsmanship and precision equipment that delivers seamless welding that is flawless, and a superior fit & finish that is noticeable.

The patented Easy Mounting system enables the hood to be installed in just 6 easy steps, and ducting out the rear wall is now possible.



FEATURES

- Hush system
- Elica easy mounting
- Heat guard
- Rear outlet installation
- Seamless look
- Professional performance
- Grease collectors



GENERAL PROPERTIES

Width	36"	48"
Model	EORX36SS	EORX48SS
Dimensions	36"W x 24 5/16"D x 30"H	48"W x 24 5/16"D x 30"H
Blower type: (sold separately)	Requires purchase of insert hood EAR634SS (600 CFM) or EAR134S4 (1200 CFM)	Requires purchase of insert hood EAR140S4 (1200 CFM)
Finish	Stainless Steel +Front and lateral rim -mirror stainless steel +Decorative bands & rivets - mirror stainless steel 2 for 36" & 3 for 48"	
Installation type	6 easy steps for mounting, compatible with Arezzo insert	

KITS

Duct cover extension	KIT0182781-KIT0182781A (36" width x 6" tall) KIT0182782-KIT0182782A (36" width x 18" tall)	KIT0182783-KIT0182783A (48" width x 6" tall) KIT0182784-KIT0182784A (48" width x 18" tall)
----------------------	---	---

6 EASY STEPS FOR MOUNTING


1 Drill using installation template.



2 Fix support Brackets to wall and ceiling.




3 Secure the insert hood to the lower support.

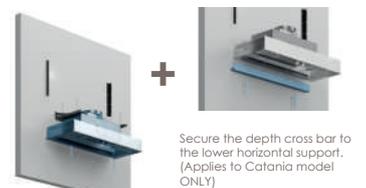

4 Affix the ducting. Choose between Rear or Ceiling Outlet.



5 Slip the fixed bolts on the shell into the eyelets in the vertical brackets, lay the top of the shell over the ceiling bracket. A solid connection will create a "click".

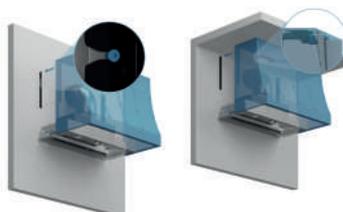

6 Secure the insert hood to the Shell from the inside placing the screws on the corresponding drill holes.



*For ceiling flush installation, an optional Trim Kit is available.