

# EF-1500

## FULL FLOW DRINKING WATER SYSTEM



### FEATURES • BENEFITS

- ◆ Commercial-grade water filtration for the home
- ◆ NSF/ANSI Standard 401 certified for the reduction of the incidental contaminants/emerging compounds listed in the performance data sheet
- ◆ NSF/ANSI Standard 53 certified to reduce cysts such as *Cryptosporidium* and *Giardia* by mechanical means
- ◆ Reduces particles as small as 0.5 micron in size by mechanical means
- ◆ The Pentair® Everpure® signature metal canister delivers commercial-grade durability
- ◆ Retains vital minerals found naturally in water to ensure the delicious taste of your water
- ◆ Built-in water shut-off allows for easier cartridge changes
- ◆ No separate faucet required

### INSTALLATION TIPS

- ◆ Install vertically with cartridge hanging down.
- ◆ Flush new cartridge at full flow for three minutes to purge air.
- ◆ Space required: 5W x 15H x 5D in (13W x 38H x 13D cm) including 2½ inches of clear space under unit for cartridge change.


### OPERATION TIPS

- ◆ Replace cartridge when capacity is reached, or when flow becomes too slow, but at least annually.
- ◆ Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts.

### INCLUDES

- ◆ Installation and operation manual

# EVERPURE EF-1500 FULL FLOW DRINKING WATER SYSTEM

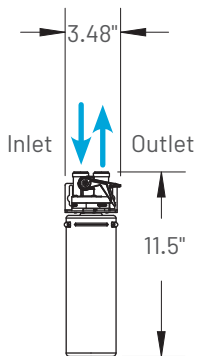

## SPECIFICATIONS

- ◆ **System**  
(Model / Part No.)  
EF-1500 / EV985800
  - ◆ **Flow Rate**  
controlled at 2.2 gpm (8.3 Lpm)
  - ◆ **Inlet Size**  
3/8" QC
  - ◆ **System Dimensions**  
3.5" W x 11.5" H x 4.25" D  
(8.9W x 29.21H x 10.8D cm)
  - ◆ **System Weight**  
3.8 lbs (1.72 kg)
  - ◆ **Contaminant Reduction**  
Chlorine Taste & Odor, Lead, Microplastics, Cysts: NSF/ANSI Standard 53 certified to reduce cysts such as *Cryptosporidium* and *Giardia* by mechanical means.
  - ◆ **Approximate Filter Life\***  
Up to 1 Year
  - ◆ **Capacity**  
1,500 Gallons (5,600 Liters)
  - ◆ **Certifications**  
NSF/ANSI Standard 42, 53, 401
  - ◆ **Pressure**  
10-125 psi (0.7-8.6 bar) non-shock
  - ◆ **Temperature**  
35-100° F (2-38° C)  
cold water use only
  - ◆ **Replacement Cartridges**  
(Model / Part No.)  
EF-1500 / EV985850 (1-pack)
- \* Filter life dependent on gallon usage and overall incoming water quality.



The model EF-1500 is Tested and Certified by NSF International against NSF/ANSI Standards 42, 53, and 401 for the reduction of the claims specified on the Performance Data Sheet.

EPA Est. 002623-IL-002



Pentair Residential Filtration, LLC

13845 Bishops Dr. | Suite 200 | Brookfield, WI 53005 | United States

P: 262.238.4400 | Customer Service: 800.279.9404 | [tech-support@pentair.com](mailto:tech-support@pentair.com) | [pentair.com](http://pentair.com)

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

©2025 Pentair. All Rights Reserved.

4003261 AP25