

48" EVOQUE INDUCTION RANGE

EVOQUE 400 SERIES



MODEL CODE

F4EIR486CS1-**



- Easy clean ceramic glass
- Bridge zone
- Power boost burner
- Pan detection system
- Residual heat sensor

- Dual true convection (main oven)
- Single true convection (accessory oven)
- Soft closing door
- Self clean oven
- 1 Telescopic rack
- Cool touch door
- Digital controls (main oven)
- Meat probe
- Fast pre-heat



F4EIR486CS1-BK
GLOSSY BLACK RAL 9004



F4EIR486CS1-IV
GLOSSY IVORY RAL 1013



F4EIR486CS1-WH
GLOSS WHITE RAL 9016



F4EIR486CS1-SS
STAINLESS STEEL



F4EIR486CS1-MB
MATTE BLACK RAL 9004



F4EIR486CS1-MI
MATTE IVORY RAL 1013



F4EIR486CS1-MW
MATTE WHITE RAL 9016



F4EIR486CS1-RAL
RAL CODE

DESCRIPTION

The Evoque 48" induction range draws inspiration from a time when ranges were crafted not only for function, but as expressions of Italian artistry and design heritage. Conceived as a distinctive statement piece, Evoque seamlessly blends the elegance and influence of the Italian Renaissance with the high-performance features North American consumers expect from a professional-style range. Each Evoque range is meticulously handcrafted in Italy's Veneto region, using only the finest materials to ensure a balance of timeless design, exceptional craftsmanship, and modern-day precision. Finished with a refined Chrome and Brushed Stainless metal finish, the Evoque range is offered in a selection of standard colors or can be custom ordered in any RAL color to suit your personal style.

OPTIONAL ACCESSORIES

F6BG48STD	Standard trim
F6BG48HBT	High back trim
F6BG48BCI	Island trim
FMTRP30	Telescopic rack
FMTRP18	Telescopic rack

SPECIFICATIONS

COOKING SURFACE

- 6 Powerful premium european inductors
- 4 Single induction cooking zones
- 1 Max power with Ø 11" cooking zone
- 2 Bridge zone elements (griddle function)
- Elegant ceramic glass surface
- Booster function for each cooking zone
- Residual heat and power-on Indicators
- Pot detection system
- Child lock function
- Automatic heat-up

OVEN


- Dual true convection (main oven)
- True convection (accessory oven)
- Self-cleaning + multi-baking (main oven)
- Black porcelain enamel interior
- Cool touch, soft-closing doors
- Extra-large cavity and viewing area
- 3 Halogen lights (main oven)
- 2 Halogen lights (accessory oven)
- 2 Chrome racks per oven
- 1 Telescopic rack per oven
- 1 Meat probe
- Total capacity 4.34 cu. ft. and 2.24 cu. ft.

OVEN FUNCTIONS

- Bake
- Broil
- Roast
- True Convection
- Warm / Proof / Dehydrate
- Meat Probe
- Self-clean (main oven)
- Sabbath mode (main oven)
- Convection roast

EVOQUE 400 SERIES

48" EVOQUE INDUCTION RANGE

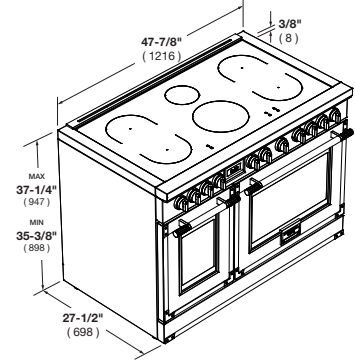

MODEL CODE				F4EIR486CS1-**			
Series				48" Evoque - Induction			
COOKTOP							
Type Cooking Surface				Induction Ceramic Glass			
Knobs				•			
Induction Special Features				BASIC 4			
				Pot Detection System		Child lock function	
				Cooling fan system		Failure Codes indication	
INDUCTION CONTROL FEATURES							
				Knob for power setting (illuminated)		Power levels 1 to 9	
				Digital display for power level indication		Booster/Fast boil function for each zone	
				Heat up time automatic		Minute minder	
				Residual heat indication			
COOKING ZONES				6			
Front Left	Power L9	Booster	Inductor Octa	(210x190 mm)	2100W		3000 W
Rear Left	Power L9	Booster	Inductor Octa	(210x190 mm)	2100W		3000 W
Front Right	Power L9	Booster	Inductor Octa	(210x190 mm)	2100W		3000 W
Rear Right	Power L9	Booster	Inductor Octa	(210x190 mm)	2100W		3000 W
Front Middle	Power L9	Booster	Inductor 10"	(250 mm)	2300W		3000 W
Rear Middle	Power L9	Booster	Inductor 6	(145 mm)	1400W		1850 W
OVEN							
Type				ELECTRONIC (18")		ELECTRONIC SELF-CLEANING (30")	
Oven Type				Multifunction 1 Fan (True Euro Conv.)		Multifunction 2 Fans (True Euro Conv.)	
Temperature Regulation				Mechanical thermostat		Electronic	
Functions							
True European Convection Bake (Multi-level)				•		•	
Convection Broil				•		•	
Convection Roast				•		•	
Bake / Broil				•		•	
Pizza (Lower Convection)				•		-	
Thaw (Defrost)				-		•	
Oven Lights				•		•	
Control Panel							
Control type				Thermostat		OKIDA OC3100 - Electronic	
Clock, Temperature, Function Display				No display		White LED	
Commands				2 Knobs		2 Knobs	
Electric Oven Features							
Preheat bar (25%, 50%, 75%, 100%)				-		•	
Sabbath mode				-		•	
Hours clock format AM / PM				-		•	
°F-°C degree unit				-		•	
Oven Door(s)							
Oven Glass Window				Deep Embossed Window		Deep Embossed Window	
Door Cooling System / Soft closing system				4 Pane Heat Resistant Glass / •		4 Pane Heat Resistant Glass / •	
Handle style (30mm Ø)				Removable metal end cap		Removable metal end cap	
Oven Cavity							
Net Capacity cu. ft.				2.4		4.4	
Internal Width				12" (305 mm)		24" (610 mm)	
Internal Depth				15 3/4" (400 mm)		15 3/4" (400 mm)	
Cavity Enameling Colour				Black		Black	
Rack Positions				6		6	
Oven Lights				2 x 20 W Halogen		3x 20 W Halogen	
Heating Element							
Broil Upper Heating Element				2100 W (240 V)		3100 W (240 V)	
Upper Auxiliary Element Wattage				700 W (240 V)		1032 W (240 V)	
Concealed Bake Lower Heating Element				1750 W (240 V)		1400 + 600 W (240 V)	
Convection Element Wattage				1 x 2500 W (240 V)		2 x 1300 W (240 V)	
Oven Accessories							
Chromed racks				•		•	
Enameled Grill set (basin + anti splash)				-		•	
Telescopic chromed rack				•		•	
Meat probe				not present		1	
DIMENSIONS WEIGHT (In or Lbs)							
Overall dim - Width Height Depth (Included Handle)				47 3/4" (1216 mm) 35 3/8" (898) - 37 1/4" (947) 29 3/4" (756 mm)			
Gross weight Net weight				199 kg - 439 lb 174 kg - 384 lb			
POWER / RATINGS (208/240 V, 60 Hz)							
KW/Amps rating at 120-240 V, 60 Hz				17,5 kW - 73 A			
KW/Amps rating at 120-208 V, 60 Hz				15,6 kW - 75 A			
Power Cable Cable length				Nema 14-50P 59 1/16" (1500mm)			
INSTRUCTIONS FOR USE							
Use & Care Manual - Installation Manual				EN, SP, FR			