

36" GAS COOKTOP



MODEL CODE

MATTEO 400 SERIES

F4MEGK36S1



Heavy-Duty Grates



Continuous Grate Surface



Dual-Flame Burner



Automatic Reignition System



Brass Burners



Americans with Disabilities Act †

DESCRIPTION

The Matteo 400 series 36" gas cooktop blends sleek design with robust performance. Featuring brass burners and a unique European-inspired burner layout, including an offset wok burner for versatile cooking options. Its modern look suits any kitchen, while durable cast iron grates provide a sturdy, seamless surface that's easy to clean. The thoughtful burner design allows for smooth pan movement and efficient multitasking, with the added safety of automatic re-ignition. Built for discerning cooks, this cooktop delivers flexibility and precision, making every meal an enjoyable experience from start to finish.

FEATURES

- 5 gas burners with 1 dual-flame burner (Left)
- Polished Brass burners
- Automatic re-ignition system
- Heavy-duty continuous cast iron grates
- Elegant brushed stainless steel cook top base
- Convertible to Liquid Propane

INCLUDED ACCESSORIES

- | | |
|-------------|-------------------|
| 41091256 | Installation Kit |
| 49000100544 | LP Conversion Kit |

OPTIONAL ACCESSORIES

- | | |
|-------|--------------|
| FMWOK | Wok Ring |
| FMSIM | Simmer Plate |

† To achieve full ADA compliance, please consult the current ADA requirements for product installation instructions.


36" GAS COOKTOP



MODEL CODE

MATTEO 400 SERIES

F4MEGK36S1

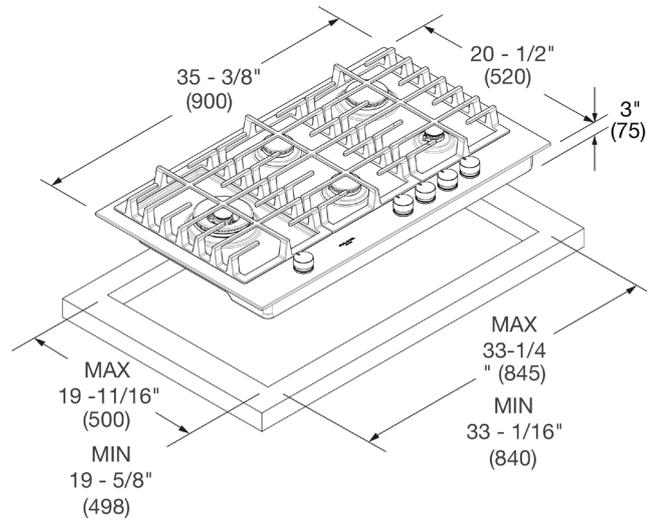

MODEL CODE	36" GAS COOKTOP F4MEGK36S1	
GENERAL DETAILS		
Finish	Brushed Stainless Steel	
Control Type	Knobs	
Fuel Type	Gas (NG or LP)	
Heavy-Duty Cast Iron Grates	3	
Cooking Zones	5	
Sealed Burners	Yes	
DIMENSIONS / WEIGHT		
Product Width, in. (mm)	35-3/8	(900)
Product Height, in. (mm)	5-1/4	(132)
Product Depth, in. (mm)	20-1/2	(520)
Cutout Width (min-max), in. (mm)	33-1/16 - 33-1/4	(840 - 845)
Cutout Height (min), in. (mm)	3-3/8	(86)
Cutout Depth (min-max), in. (mm)	19-5/8 - 19-11/16	(498 - 500)
Net Weight, lbs. (kg)	40	(18)
POWER / RATINGS (120 V, 60 Hz)		
Power (min-max) (Left)	850 BTU/h (250 W) - 20000 BTU/h (5865 W)	
Power (min-max) (Front Center)	1300 BTU/h (380 W) - 8000 BTU/h (2350 W)	
Power (min-max) (Front-R)	1000 BTU/h (295 W) - 4000 BTU/h (1175 W)	
Power (min-max) (Rear-Center)	1300 BTU/h (380 W) - 8000 BTU/h (2350 W)	
Power (min-max) (Rear-R)	2200 BTU/h (645 W) - 12000 BTU/h (3520 W)	
TECHNICAL DETAILS		
Amperage Rating	0.1 A	
Maximum Power	52000 BTU/h (15295 W)	
Power Cable	3 Prong Nema 5 - 15P	
Power Cable Length, in. (mm)	51	(1300)
Electrical Circuit	120 V - 60 Hz - 15 A	
LP Kit Included	Yes	
INSTRUCTIONS FOR USE		
Use & Care Manual / Installation Manual	English / French / Spanish	
WARRANTY		
Limited Warranty	Parts and Labor (2-year)	