

BUILT-IN FRIDGE 30"

30" STAINLESS STEEL EXTERIOR BUILT-IN FRIDGE

CODE ID

F7SRC30S1-R (RIGHT HINGE)

CODE ID

F7SRC30S1-L (LEFT HINGE)



RIGHT HINGE



LEFT HINGE



Total No Frost



LED lighting



Integrated Installation



Holiday Mode



Sabbath Mode



Features


Our stainless column refrigerators are as beautiful as they are Functional. With an elegant 304 stainless clad door and matching pro handle these columns match perfectly with our Fulgor Milano stainless cooking products and feature a brilliant white aluminum interior with brushed aluminum and stainless accents. Food preservation is the name of the game, by combining elegant design and commercial quality to ensure the highest performance preserving the organoleptic qualities of your precious ingredients. A dedicated compressor and evaporator provide consistent and precise temperature throughout.

SPECIFICATIONS

Stainless Steel Exterior
Microbeaded stainless steel crisper drawers with soft closing
Height adjustable glass shelves
Luminous white interior
Multilevel LED lighting
Professional handle kit included

REFRIGERATION

BUILT-IN FRIDGE COLUMN

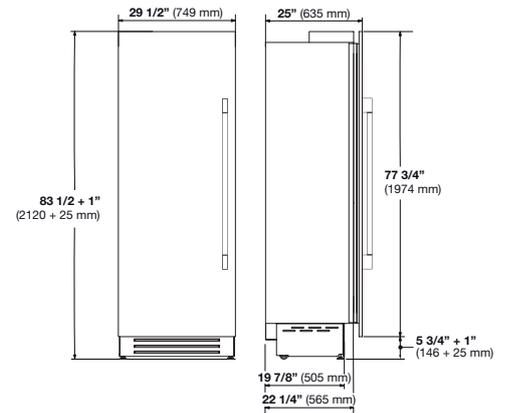


CODE ID		30" BUILT-IN FRIDGE F7SRC30S1-L (LEFT HINGE) F7SRC30S1-R (RIGHT HINGE)	
Finish	Stainless Steel Exterior		
PERFORMANCES/CAPACITY			
Annual Energy Usage	343 kWh/yr		
Interior capacity (cbft)	17.44		
FEATURES			
Professional handle kit	•		
Shelves	3		
Adjustable Door Bins	3		
Crisper Drawers	3		
LED lighting	•		
No Frost	•		
DIMENSIONS/WEIGHT			
Width in	30"	762	mm
Height in	83 - 1/2"	2120	mm
Depth without handle in	25"	635	mm
Minimum niche height in	84 - 1/2"	2145	mm
Door clearance in	52"	1320	mm
Door opening angle	100°		
Net Weight	357 lbs	162	kg
POWER / RATINGS (115 V, 60 HZ)			
Watts / Amps	218W - 2A		
Power Cable	Nema 5-15P		
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	English / French / Spanish		


BUILT-IN FRIDGE 30"

NICHE SPECIFICATIONS AND DIMENSIONS


NA STANDARD CUTOUT

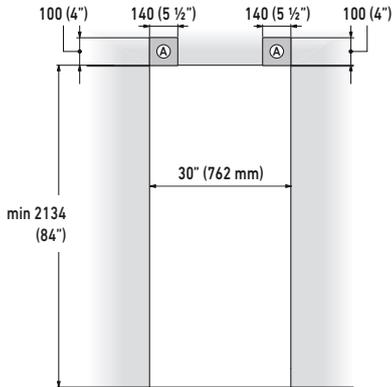


EUROPEAN STANDARD CUTOUT

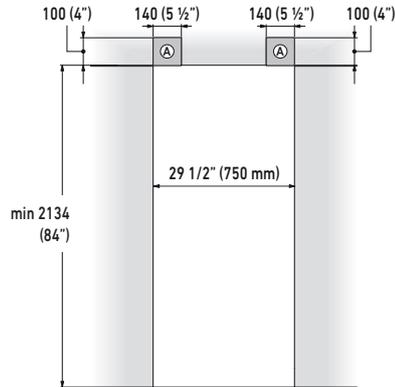


DOOR SWING CLEARANCE

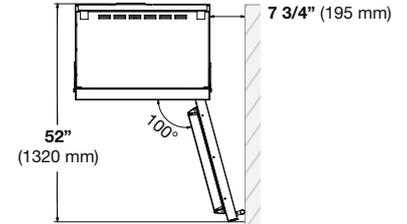

North American Standard installation

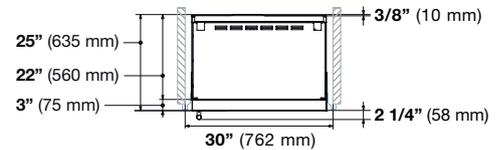

European Standard installation

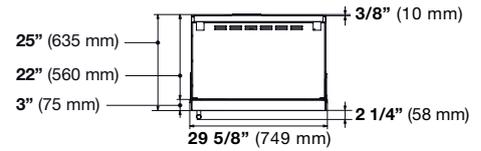

When installing our top compressor models in a standard NA cut out it is recommended to use the J-profile trim kit to close the lateral gap of the appliance, alternatively use the standard plastic mounting clips when installing unit into Euro width cabinet.

Installing in the unit in a standard North American "cutout" without the J-profile trim kit, will result in a larger gap along the cabinet opening.



When installing our top compressor models in a new construction, it is recommended to use the European "cutout" dimensions to achieve a minimal gap on the lateral sides and avoid the need to use the J-profile trim kit.

Installing in the unit in a standard North American "cutout" without the J-profile trim kit, will result in a larger gap along the cabinet opening.

TECHNICAL DATA

(A) Niche Width	see above
(B) Unit Width	29 1/2" (749 mm)
(C) Unit Width with lateral frames	30" (762 mm)

ELECTRICAL AND WATER CONNECTIONS

