


Designer Pyramid Wall Mount Hood with Offset Lip, Magic Lung® Blower

A crisp pyramid silhouette and distinctive offset lip give this hood a timeless architectural look. Patented Magic Lung® technology delivers powerful yet exceptionally quiet ventilation through centrifugal filtration, while SensaSource® automatically adjusts blower speed for enhanced grease control and fire safety. Dishwasher-safe components simplify cleanup. Matching duct covers sold separately.


To view available finishes & accessories please visit ventahood.com/products/JPH348/C2

SPECIFICATIONS

WIDTH	48"
DEPTH	24"
HEIGHT	30"
CFM ¹	900
EQUIVALENT CFM ²	1350
SOUND RATING (HIGH SPEED) ³	6.3 Sones / 56.8 dB
LIGHTING ⁴	3 LEDs 2700K Warm White

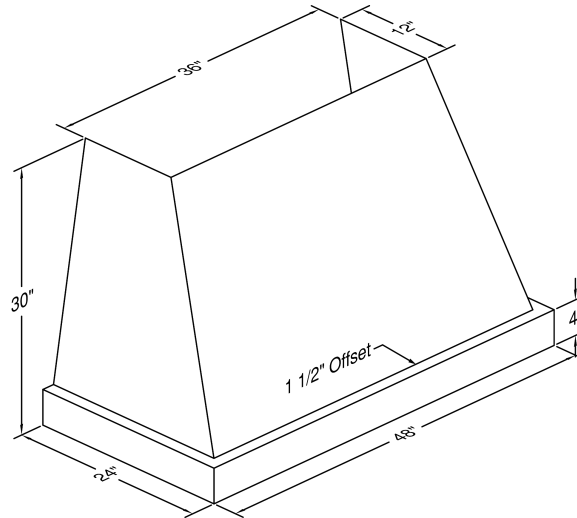


DUCT COVERS




Wall Mount Duct Cover
Models: WDCRND-*

RECOMMENDED MOUNTING HEIGHT

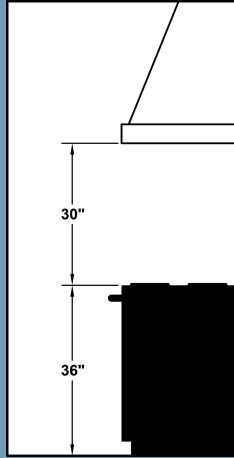


NOTE: Exceeding recommended mounting height may compromise performance.


CONNECTIONS

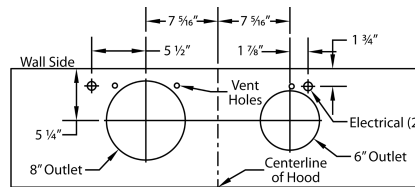


900 CFM B200 Dual & B100 Single Blower (Top View)

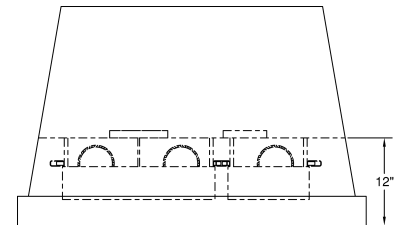

(Front View)



VP562 Transition (Optional) For
B300 (B200 Dual Blower & B100
Single Blower)



VP562 transition centers outlet over
top of hood.

ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

MODEL	VOLTS	AMPS	HZ	RPM	CFM @ 0.0" SP ⁵	CFM @ 0.1" SP	CFM @ 0.2" SP	CFM @ 0.3" SP	MIN. ROUND DUCT SIZE
B200 Dual & 1 x B100 Single	115	6.0	60	1550	900	804	725	655	10" (79sq.in.)

¹ CFM (cubic feet per minute) measures airflow. ² Because Magic Lung® blowers use centrifugal filtration instead of traditional baffle or mesh filters, they move air more efficiently. When comparing to other brands, use Equivalent CFM to understand real-world performance. ³ Sones measure perceived loudness—lower values indicate quieter operation. Decibel values shown are approximate equivalents. ⁴ This model is not available with heat lamps. ⁵ Airflow (CFM) decreases as duct resistance (static pressure) increases. Values at 0.1"–0.3" SP reflect typical installed conditions.