

KPRU30X

Product family	Hood
Hood Type	Under cabinet
Design	Canopy pro-style
Extraction	Vented
Electronic control	Yes
Material	Stainless steel
Stainless steel type	Brushed
EAN code	8017709338565
Aesthetics	Classic
Color	Stainless steel
Finishing	Satin
Logo	Embossed



Controls



Control setting

Touch controls

Program / Functions

Speed levels	4
Intensive speed	
24h air replacement function	
Auto-vent 2.0	

Technical Features






No. of lights	2	No. of filters	2
Lighting	LED	Anti-grease filters	Stainless steel
Light power	1.3 W	Filter replacement indicator	Yes
Dimmable light	Yes	Vent outlet	5 7/8 "
Light color temperature scale (°K)	3000 °K	Minimum distance from gas cooktop	750 "
Maximum extraction capacity at free mode	599 CFM	Minimum distance from electric cooktop	650 "
Motor power	350 W	Non-return valve	Yes

	Extraction rate [CFM]	Noise level [dBA]
Speed level 1	213	54
Speed 2	325.5	63
Speed 3	454	70
Intensive speed	590.5	76

Electrical Connection

Electrical connection rating	353 W	Frequency (Hz)	60 Hz
Voltage	120 V	Power supply cable length	1000 "

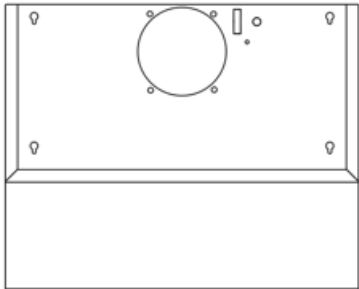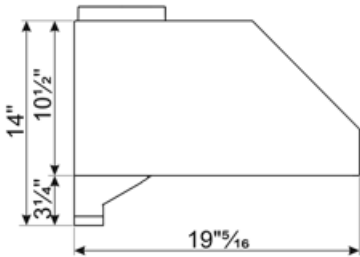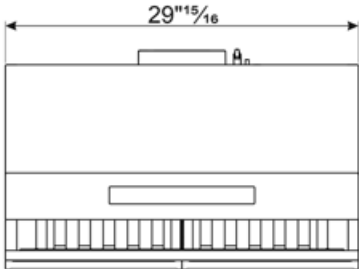

Compatible Accessories

FLT6U



Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	Warning light(s): to advise when filters need changing.		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.		Intensive/turbo setting: when extra fast extraction is required.
	...		V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use.