



SPEED QUEEN® ON-PREMISES LAUNDRY SOLUTIONS

# Stacked Washer-Dryer

LTEE5ASP179TW01, LTGE5ASP119TW01

## Stacked Washer-Dryers

Our stacked washer-dryers are designed as vertical combinations that provide all of the power of Speed Queen® washers and dryers while occupying only half of the floor space of a conventional washer and dryer setup. Plus, these stacked units allow you to utilize the same connections and hook-ups required by a standard washer and dryer, so you won't have to make changes to your installation.

- ENERGY STAR® Qualified to use less energy, save money and help protect the environment.
- Water use is trimmed to 13.9 gallons per cycle to reduce operating costs.



Washer Control




Dryer Control

### Electronic Control

Speed Queen® washers and dryers with Electronic controls are designed for durability and are easy to operate with intuitive selection buttons and cycle status indicator lights. This control option features a time-remaining display, six preset cycle buttons, cycle adjustability for temperature and load size, soils levels along with additional cycle enhancer options for a pre-wash or second rinse cycle.

# Stacked Washer-Dryer

Specifications		
Model		LTEE5ASP179TW01, LTGE5ASP119TW01
Control Option		Electronic
Control Location		Front
Capacity - lb (kg)	Washer	21.5 (10)
	Dryer	18 (8.2)
Cylinder Volume - cu. ft. (liters)	Washer	3.42 (96.8)
	Dryer	7.0 (198)
Overall Width - in (mm)		26.875 (683)
Overall Depth - in (mm)		27.73 (704)
Overall Height - in (mm)		78.5 (1994)
Spin Speed G-Force -RPM		440 (1200)
Motor Power Consumption - hp (kw)	Washer	0.9 (0.67) Variable Speed
	Dryer	0.33 (0.25)
Water Consumption Per Cycle - g (l)		13.68 (51.8)
IWF (Water Factor)		4.0 (0.53)
IMEF (Modified Energy Factor)		2.20 (62.3)
Available Heat Sources		Gas or Electric
Available Heating Element (Electric W)		5350 @ 240V
Gas Inlet Connection - in (mm)		3/8 (9.5)
Gas Consumption - BTU/Hr		22,500
Exhaust Outlet DIA. - in (mm)		4 (102)
Exhaust Airflow - cfm (liters/sec)		220 (105)
Available Water Temperatures		3
*Available Cycles	Washer	Heavy Duty, Normal Eco, Perm Press, Delicate, Rinse & Spin, Spin Only
	Dryer	Regular, Perm Press, Delicate, Time Dry, Quick Dry, Fluff Up
Water Pressure -PSI (Bar)		20-120 (1.4/8.3)
Cycle Indicator Lights		Yes
Cylinder Finish	Washer	Stainless Steel
	Dryer	Galvanized
Available Colors		White
Door Type		Solid
Available Electrical Requirements - Voltage/Hz/Ph - Circuit Amperage	Washer	120/60/1 - 15
	Electric	208/240/60/1 -30
	Gas	120/60/1 - 15
Shipping Dimensions Approx. - in (mm)	Width	30 (762)
	Depth	34 (864)
	Height	80 (2032)
Net Weight - lb (kg)		350 (159)
Shipping Weight - lb (kg)		380 (172)
Agency Approvals	Electric	cULus
	Gas	cCSAus

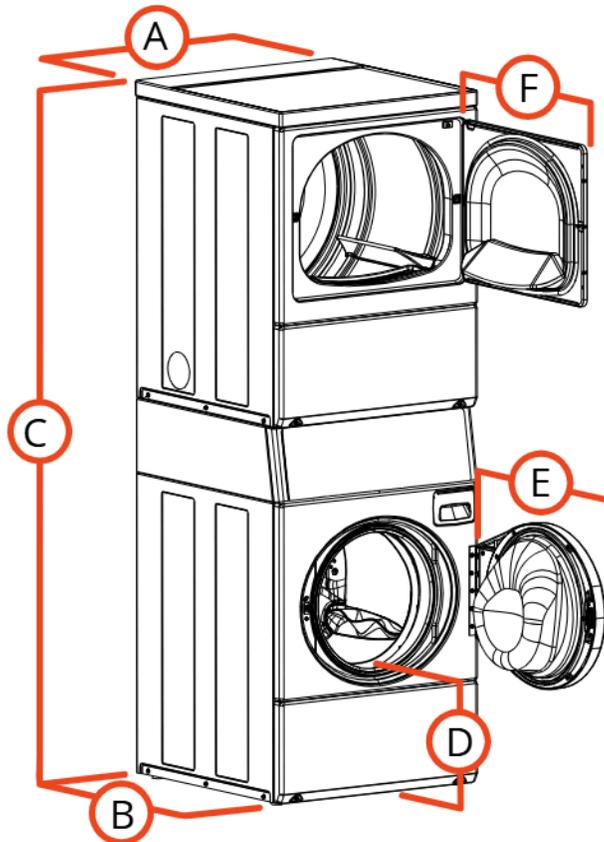

A. Overall Width - in (mm)	26.875 (683)
B. Overall Depth - in (mm)	27.73 (704)
C. Overall Height - in (mm)	78.5 (1994)
D. Floor To Door Opening - in (mm)	14.5 (368)
E. Washer Door Swing - in (mm)	24 (610)
F. Dryer Door Swing - in (mm)	23.5 (597)

#### ADA Compliant - Lower Unit

Note: Not all options are available for all models. Refer to the price list for the available models and options.

\* information shown applies to highest end control available.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.