



MARVEL

OWNER'S GUIDE & SERVICE MANUAL

MARVEL UNDERCOUNTER REFRIGERATION



Model: MANP415-IS01A

WELCOME

Welcome to the Marvel Experience!

Thank you for choosing our quality product to add to your home. We are thrilled to welcome you to our growing community of Marvel owners, who trust in our products and our support.

The information in this guide is intended to help you install and maintain your new Marvel undercounter model to protect and prolong its lifetime. We encourage you to contact our Technical Support team at (616) 754-5601 with any questions.

Got a Marvelous Design?

We would love to see how your Marvel product looks in its new home. You can send us photos of your installed product at marketing@marvelrefrigeration.com, and we might feature your Marvel home design on our website and social media!

Warranty Registration

It is important you register your product warranty after taking delivery of your appliance. You can register online at www.marvelrefrigeration.com.

The following information will be required when registering your appliance:

Serial Number

Date of Purchase

Dealer's Name and Address



**Online registration
available at
marvelrefrigeration.com**

The serial number is located on the back of the cabinet near the top.

TABLE OF CONTENTS

Tip: Click on any section below to jump directly there

Installation

[Integrated Panel Dimensions](#)

[Integrated Panel Installation](#)

INTEGRATED PANEL DIMENSIONS

NOTE

Due to differences in surrounding cabinetry, the panel may not perfectly align with the door. The procedure below is designed to provide a finished overlay panel that seamlessly integrates with surrounding cabinetry.

The door panel must not weigh more than 20 lbs (10 kg).


It is important to ensure that all drilled holes are drilled to the correct depth in order to avoid splits in the wood when hardware is installed.

When applying an overlay panel to a unit, ensure that both sides are finished in order to prevent warping.

A full overlay door panel completely covers the door frame and provides a built-in appearance.

Overlay Panel Preparation


1. Cut the panels to the dimensions listed in the diagram.
For optimal results, have a qualified carpenter verify all measurements.
2. Optional: Stain or finish panel to desired stain or color.
Be sure to closely follow the instructions provided by the manufacturer.
3. Optional: Install handles and hardware.

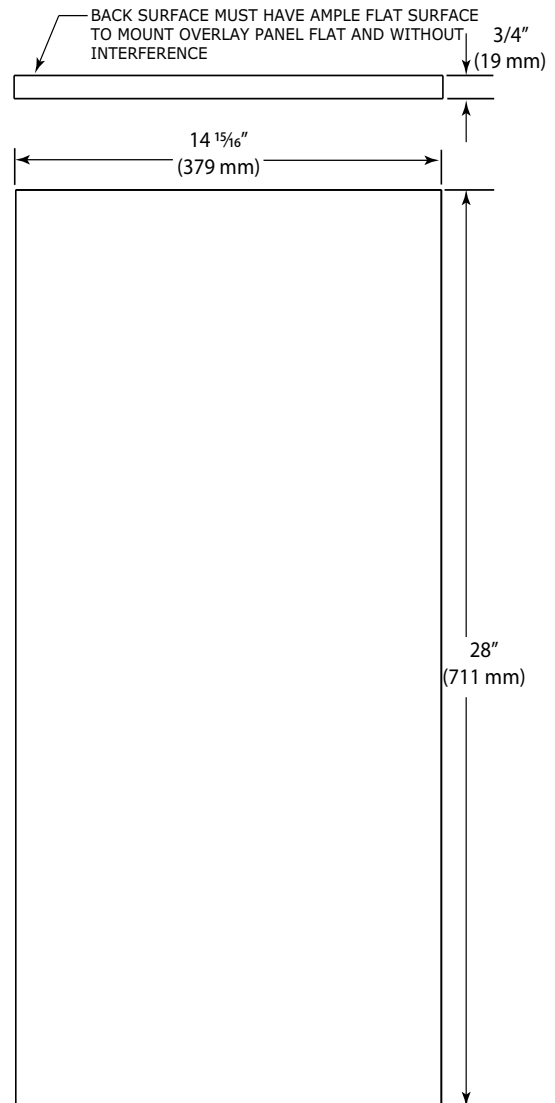

INTEGRATED PANEL INSTALLATION

Prepare Integrated Panel

1. Remove door from unit
(See To Reverse the Door Swing)
2. On a flat surface, line up the door to the integrated door panel and clamp.
3. Remove gasket and gasket channel filler to expose side holes.
4. Install 10 screws to secure door to panel.
 - 6 - $2\frac{5}{32}$ " M4 Truss Head tapping Screws
 - 4 - $1\frac{5}{32}$ " M4 Truss Head tapping Screws

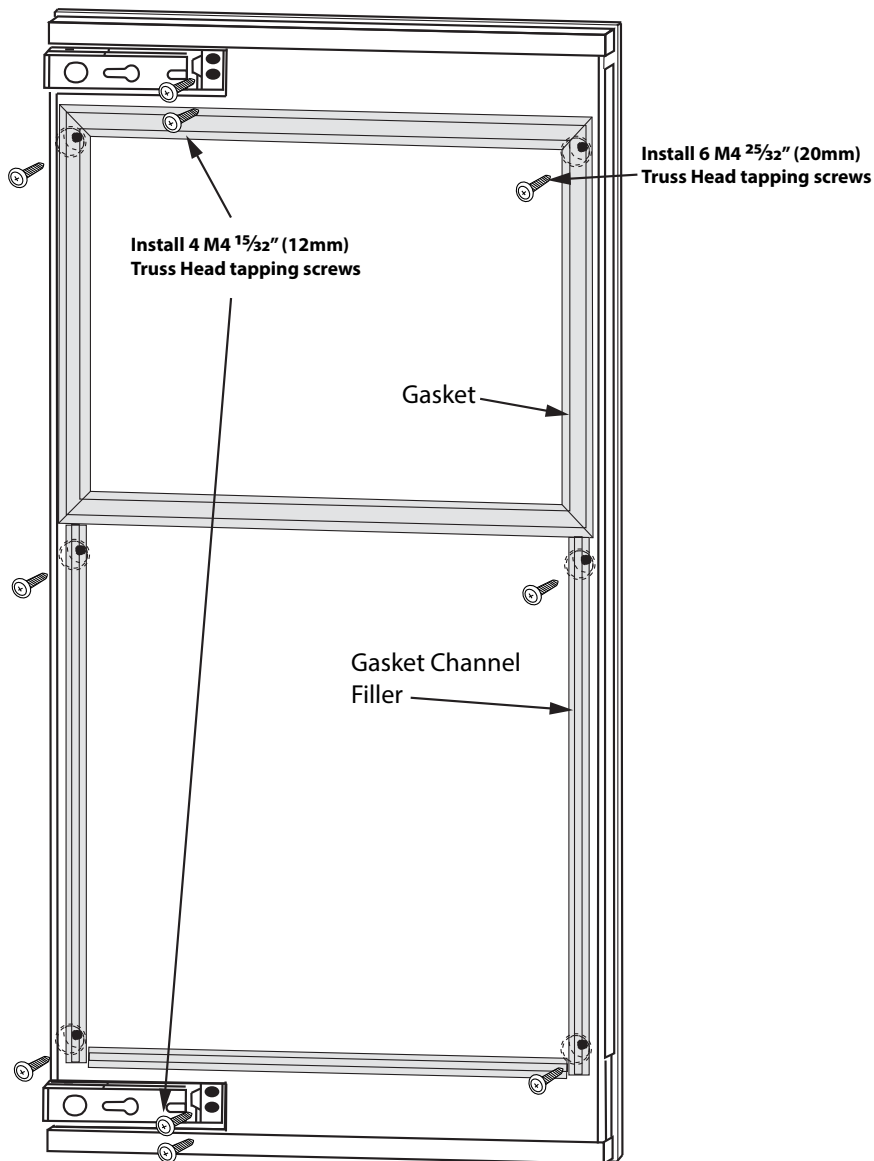

5. Reinstall gasket channel filler.
6. Remove clamps.
7. Reinstall door to unit.