MAST366RTBXT

MASTER SERIES 36" GAS RANGETOP 6 BRASS BURNERS





Bring Italian design and precision into your kitchen with the Bertazzoni signature counter-depth rangetop, designed to install flush with surrounding countertops and cabinets.

Cook like a pro on the six Monobloc brass burners and cast iron contour grates, spaciously laid out to accommodate pots of different sizes.

Crank up the heat to boil water, sear meat or cook with a wok using the two power burners with dual ring flame, which boil water faster than any burner in their class.

Delicately melt chocolate on the simmer burner.

Protect your house and your family with the 100% failsafe thermocouple technology that immediately shuts off the flow of gas in case of a flame outage.

Clean in no time after cooking, thanks to the seamless one-piece stainless worktop with integrated spill-control dams.

Designed and manufactured with pride by Bertazzoni in Italy.

Industry leading 2 years parts and labor warranty.

DDODUGT FEATURES	
PRODUCT FEATURES	
Maintop	6 burners
Burner power	2 power burners 19000 BTU 1 rapid burner 10400 BTU 2 medium burners 5900 BTU 1 simmer burner 3500 BTU
Ignition system	Electric with thermocouple safety device
Grates	Cast iron
Included accessories	1" stainless steel trim Wok ring Simmer ring
TECHNICAL SPECIFICATIONS	
Electrical supply	120 V 60 HZ - 0.01 W 1 Amps
Power connection	NEMA 5-15P with 59" power cord
Certification	UL
Warranty	2 years parts & labor
Gas type	NG
Conversion kit included	LPG
Packaging dimensions and weight	W 40" H 12 3/8" D 30 1/8" 75.0 lbs
OPTIONAL ACCESSORIE	S
CIG36	Cast iron griddle for PROF/MAST/HERT Series ranges and rangetops

rsion: 1 bertazzoni.com

MAST366RTBXT


MASTER SERIES 36" GAS RANGETOP 6 BRASS BURNERS




PRODUCT DIMENSIONS

TOP VIEW 35 3/4" (909) 25 1/4" (641)






SIDE VIEW



ELECTRICAL & GAS CONNECTION



A properly-grounded, horizontally-mounted electrical receptacle should be installed according to this drawing.

G


An agency-approved, properly-sized manual shut-off valve should be installed according to this drawing.


INSTALLATION REQUIREMENTS

Combustible material cannot be installed within shaded area.

For installation with an updraft or downdraft hood as well as any OTR, refer to the hood/OTR manufacturer's installation requirements.

CUTOUT DIMENSIONS



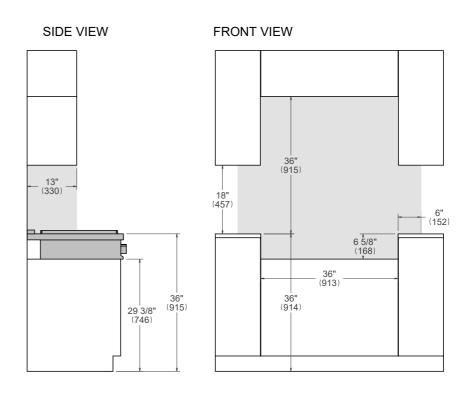

For installation of multiple products in combination, refer to the Design Guide at us.bertazzoni.com or ca.bertazzoni.com