

COMBINATION STACK WASHER/DRYER – 60 Hz



MLE22PDAYW / MLE22PRAYW
 MLG22PDAWW / MLG22PRAWW
 MLE22PDAZW / MLE22PRAZW




TURBOVENT® SYSTEM

- A high-speed blower wheel optimizes performance in long vents
- High airflow helps reduce drying times for a wide variety of loads
- Helps to increase efficiency and turns over the life of the machine



INTELLIGENT CONTROLS WITH M-SERIES TECHNOLOGY

- Easy-to-read diagnostics assist with quick identification of an issue helping to get the machine back into service
- Owners can control time-of-day pricing and charge for individual cycle modifiers such as add a rinse or water temperature
- End users can easily choose their preferred wash experience with one-touch cycle selection
- Digital display clearly conveys prices, selections, and time remaining



SPACE-SAVING CONFIGURATION

- All within the floor space of a single unit, the large capacity of the 3.1 cu. ft. washer provides ample room for bulky items, while the extra-large, 6.7 cu. ft. dryer allows for loads to be dried effectively
- Saving space can still deliver an optimal cleaning experience for end-users and help maximize facility productivity



BUILT TO LAST

- Porcelain enamel top — a durable finish that stands up to the demands of high-traffic
- Premium bearings — oversized premium NSK bearings are sealed for added protection of the drive system
- Robust hinge — heavy-duty, die-cast door hinge is built to withstand the rigors of commercial laundry



COIN READY
 MLE22PDAYW / MLG22PDAWW



CARD READER READY & NON-VEND
 MLE22PRAZW, MLE22PRAYW
 MLG22PRAWW



COIN READY
 MLE22PDAZW

| COMBINATION STACK WASHER/DRYER — 60 Hz | | |
|--|--------------|-----------------------|
| FUEL TYPE | MODEL NUMBER | PAYMENT CONFIGURATION |
| Electric | MLE22PDAYW | Coin Ready |
| Electric | MLE22PRAYW | Card Ready & Non-Vend |
| Gas | MLG22PDAWW | Coin Ready |
| Gas | MLG22PRAWW | Card Ready & Non-Vend |
| Electric | MLE22PDAZW | Coin Ready |
| Electric | MLE22PRAZW | Card Ready & Non-Vend |



See maytagcommerciallaundry.com for warranty details.

VISIT MAYTAGCOMMERCIALLAUNDRY.COM FOR MORE INFORMATION.


®/™ © 2021 Maytag. All rights reserved.
 D201015MY 03/21

COMBINATION STACK WASHER/DRYER – 60 Hz




MLE22PDAYW / MLE22PRAYW
MLG22PDAWW / MLG22PRAWW
MLE22PDAZW / MLE22PRAZW

SIDE VIEW

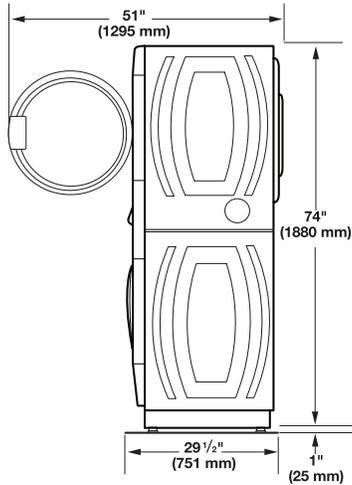

BACK VIEW

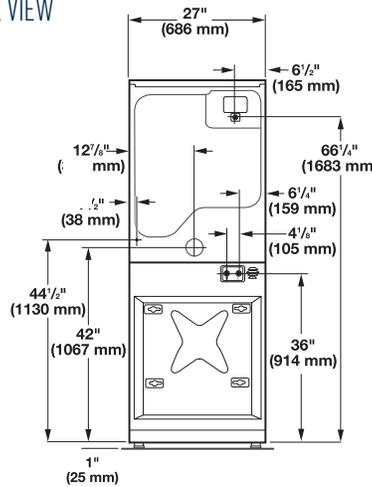

MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS

| Number Of 90° Turns | Rigid Metal Vent | |
|---------------------|-----------------------------|-------------------|
| | Box Hood and Louvered Style | Angled Hood Style |
| 0 | 135 ft. (41.2 m) | 129 ft. (39.3 m) |
| 1 | 125 ft. (38.1 m) | 119 ft. (36.3 m) |
| 2 | 115 ft. (35.1 m) | 109 ft. (33.2 m) |
| 3 | 106 ft. (32.3 m) | 100 ft. (30.5 m) |
| 4 | 98 ft. (29.9 m) | 92 ft. (28.0 m) |

| MODELS | MLE22PDAYW MLE22PRAYW | MLG22PDAWW MLG22PRAWW | MLE22PDAZW MLE22PRAZW |
|--|--------------------------|--------------------------|--------------------------|
| Fuel Type | Electric | Gas | Electric (Canada) |
| CAPACITY | | | |
| Cylinder Volume — cu. ft. (liters) | 3.10 (88) | 3.10 (88) | 3.10 (88) |
| Cylinder Diameter — in. (mm) | 21.60 (547) | 21.60 (547) | 21.60 (547) |
| Cylinder Depth — in. (mm) | 13.40 (340) | 13.40 (340) | 13.40 (340) |
| DIMENSIONS | | | |
| Width — in. (mm) | 27 (686) | 27 (686) | 27 (686) |
| Depth — in. (mm) | 29.50 (751) | 29.50 (751) | 29.50 (751) |
| Height — in. (mm) | 74 (1,880) | 74 (1,880) | 74 (1,880) |
| Door Opening — in. (mm) | 18.25 (464) | 18.25 (464) | 18.25 (464) |
| Exhaust Duct Diameter — in. (mm) | 4 (100)* | 4 (100)* | 4 (100)* |
| CRATED DIMENSIONS | | | |
| Crated Width — in. (mm) | 29.25 (743) | 29.25 (743) | 29.25 (743) |
| Crated Depth — in. (mm) | 34 (864) | 34 (864) | 34 (864) |
| Crated Height — in. (mm) | 75.75 (1,924) | 75.75 (1,924) | 75.75 (1,924) |
| APPROXIMATE WEIGHT | | | |
| Uncrated — lb (kg) Coin Drop & Coin Slide Models | 372 (169) | 378 (171) | 372 (169) |
| Uncrated — lb (kg) Card Ready & Non-Vend Models | 372 (169) | 378 (171) | 372 (169) |
| Crated — lb (kg) Coin Drop & Coin Slide Models | 383 (173) | 389 (176) | 383 (173) |
| Crated — lb (kg) Card Ready & Non-Vend Models | 383 (173) | 389 (176) | 383 (173) |
| ELECTRICAL REQUIREMENTS | | | |
| Voltage | 240V - 60Hz | 120V - 60Hz | 240V - 60Hz |
| Breaker/Fuse — amps | 30 | 15 | 40 |
| Airflow — CFM (CMM) | 215 (6.10) | 230 (6.5) | 215 (6.10) |
| Electric Heating Element (watts) | 5,600 | N/A | 5,250 |
| Gas Rating — BTU/hr (kcal/hr) | N/A | 24,000 (6,048) | N/A |
| Gas Inlet Size — in. | N/A | 3/8 N.P.T. | N/A |
| Motor Size — HP (kW) | 1/3 (.25) | 1/3 (.25) | 1/3 (.25) |

*Use 4" (100 mm) diameter rigid aluminum or galvanized steel duct. Never use plastic, non-metal or combustible duct. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice. Export model ships without coin-drop mechanism.