


# Professional Wall Mount Hood with Rounded Edges, Magic Lung® Blower

Softly rounded corners give this professional-style hood a more sculpted architectural look. Patented Magic Lung® technology delivers powerful yet exceptionally quiet ventilation through centrifugal filtration, while SensaSource® automatically adjusts blower speed for enhanced grease control and fire safety. Dishwasher-safe components simplify cleanup. Matching duct covers sold separately.


To view available finishes & accessories please visit [ventahood.com/products/NPH18-248](http://ventahood.com/products/NPH18-248)

## SPECIFICATIONS


|                                           |                            |
|-------------------------------------------|----------------------------|
| WIDTH                                     | 48"                        |
| DEPTH                                     | 24"                        |
| HEIGHT                                    | 18"                        |
| CFM <sup>1</sup>                          | 600                        |
| EQUIVALENT CFM <sup>2</sup>               | 900                        |
| SOUND RATING<br>(HIGH SPEED) <sup>3</sup> | 6.5 Sones / 57 dB          |
| LIGHTING <sup>4</sup>                     | 3 LEDs<br>2700K Warm White |

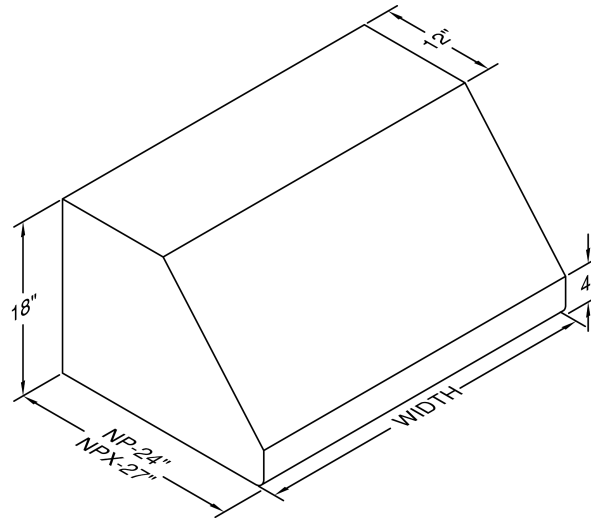

## DUCT COVERS




## RECOMMENDED MOUNTING HEIGHT

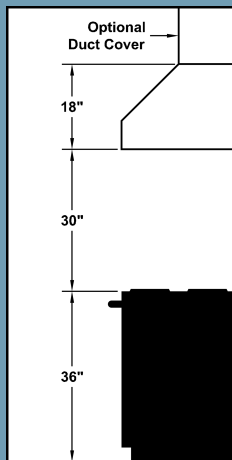

NOTE: Exceeding recommended mounting height may compromise performance.

## CONNECTIONS

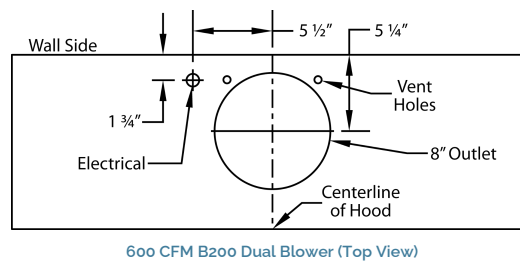

## ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

| MODEL     | VOLTS | AMPS <sup>5</sup> | HZ | RPM  | CFM<br>@ 0.0" SP <sup>6</sup> | CFM<br>@ 0.1" SP | CFM<br>@ 0.2" SP | CFM<br>@ 0.3" SP | MIN. ROUND<br>DUCT SIZE |
|-----------|-------|-------------------|----|------|-------------------------------|------------------|------------------|------------------|-------------------------|
| B200 Dual | 115   | 4.0               | 60 | 1550 | 600                           | 531              | 480              | 430              | 8" (50sq.in.)           |

<sup>1</sup> CFM (cubic feet per minute) measures airflow. <sup>2</sup> Because Magic Lung® blowers use centrifugal filtration instead of traditional baffle or mesh filters, they move air more efficiently. When comparing to other brands, use Equivalent CFM to understand real-world performance. <sup>3</sup> Sones measure perceived loudness—lower values indicate quieter operation. Decibel values shown are approximate equivalents. <sup>4</sup> WBAR warming light bar is available on selected models. <sup>5</sup> Add 2.5 amps for each warming light. This model is equipped with LED lighting: (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66"). <sup>6</sup> Airflow (CFM) decreases as duct resistance (static pressure) increases. Values at 0.1"–0.3" SP reflect typical installed conditions.