


Professional Wall Mount Hood with Rounded Edges, Magic Lung® Blower

Softly rounded corners give this professional-style hood a more sculpted architectural look. Patented Magic Lung® technology delivers powerful yet exceptionally quiet ventilation through centrifugal filtration, while SensaSource® automatically adjusts blower speed for enhanced grease control and fire safety. Dishwasher-safe components simplify cleanup. Matching duct covers sold separately.


To view available finishes & accessories please visit ventahood.com/products/NPH18-348

SPECIFICATIONS


WIDTH	48"
DEPTH	24"
HEIGHT	18"
CFM ¹	900
EQUIVALENT CFM ²	1350
SOUND RATING (HIGH SPEED) ³	6.3 Sones / 56.8 dB
LIGHTING ⁴	3 LEDs 2700K Warm White

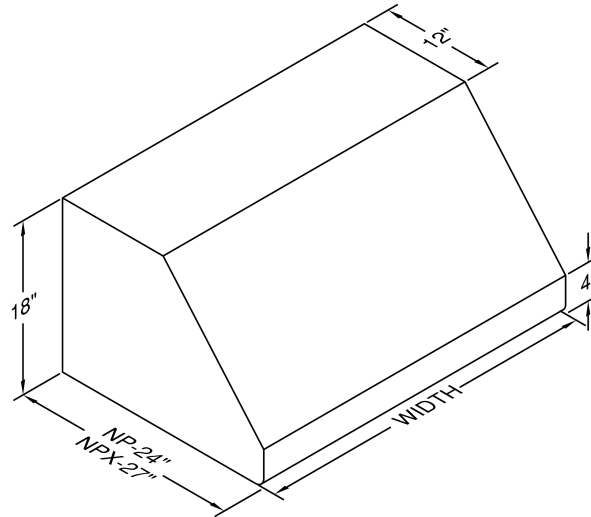

DUCT COVERS




RECOMMENDED MOUNTING HEIGHT

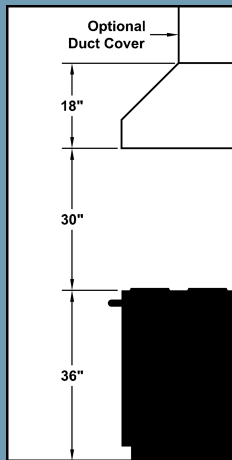


NOTE: Exceeding recommended mounting height may compromise performance.


CONNECTIONS

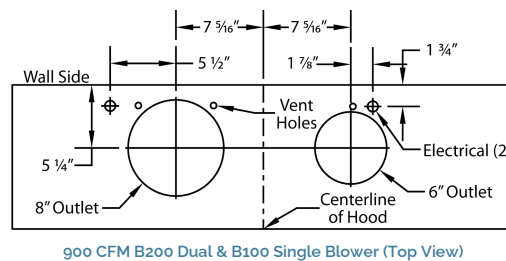

900 CFM B200 Dual & B100 Single Blower (Top View)



VP562 Transition (Optional) For B300 (B200 Dual Blower & B100 Single Blower)



VP562 transition centers outlet over top of hood.

ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

MODEL	VOLTS	AMPS ⁵	HZ	RPM	CFM @ 0.0" SP ⁶	CFM @ 0.1" SP	CFM @ 0.2" SP	CFM @ 0.3" SP	MIN. ROUND DUCT SIZE
B200 Dual & 1 x B100 Single	115	6.0	60	1550	900	804	725	655	10" (79sq.in.)

¹ CFM (cubic feet per minute) measures airflow. ² Because Magic Lung® blowers use centrifugal filtration instead of traditional baffle or mesh filters, they move air more efficiently. When comparing to other brands, use Equivalent CFM to understand real-world performance. ³ Sones measure perceived loudness—lower values indicate quieter operation. Decibel values shown are approximate equivalents. ⁴ WBAR warming light bar is available on selected models. ⁵ Add 2.5 amps for each warming light. This model is equipped with LED lighting: (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66"). ⁶ Airflow (CFM) decreases as duct resistance (static pressure) increases. Values at 0.1"–0.3" SP reflect typical installed conditions.