


Professional Wall Mount Hood with Magic Lung® Blower

Professional styling and crisp architectural lines make this hood a versatile fit for traditional and transitional kitchens. Patented Magic Lung® technology delivers powerful yet exceptionally quiet ventilation through centrifugal filtration, while SensaSource® automatically adjusts blower speed for enhanced grease control and fire safety. Dishwasher-safe components simplify cleanup. Matching duct covers sold separately.


To view available finishes & accessories please visit ventahood.com/products/PRH18-242

SPECIFICATIONS

WIDTH	42"
DEPTH	24"
HEIGHT	18"
CFM ¹	600
EQUIVALENT CFM ²	900
SOUND RATING (HIGH SPEED) ³	6.5 Sones / 57 dB
LIGHTING ⁴	3 LEDs 2700K Warm White

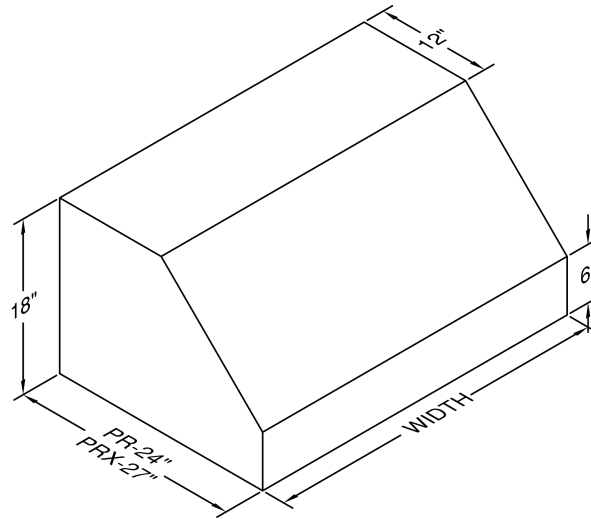


DUCT COVERS




Wall Mount Duct Cover
Models: WDCRND-*

RECOMMENDED MOUNTING HEIGHT

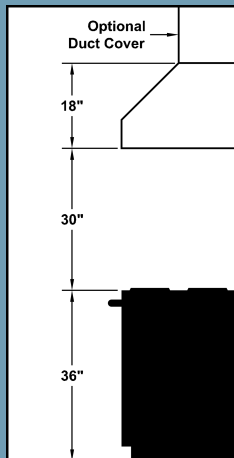

NOTE: Exceeding recommended mounting height may compromise performance.

CONNECTIONS

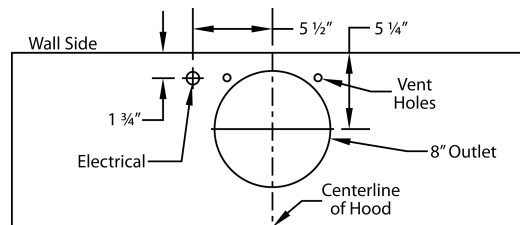

600 CFM B200 Dual Blower (Top View)

ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

MODEL	VOLTS	AMPS ⁵	HZ	RPM	CFM @ 0.0" SP ⁶	CFM @ 0.1" SP	CFM @ 0.2" SP	CFM @ 0.3" SP	MIN. ROUND DUCT SIZE
B200 Dual	115	4.0	60	1550	600	531	480	430	8" (50sq.in.)

¹ CFM (cubic feet per minute) measures airflow. ² Because Magic Lung® blowers use centrifugal filtration instead of traditional baffle or mesh filters, they move air more efficiently. When comparing to other brands, use Equivalent CFM to understand real-world performance. ³ Sones measure perceived loudness—lower values indicate quieter operation. Decibel values shown are approximate equivalents. ⁴ WBAR warming light bar is available on selected models. ⁵ Add 2.5 amps for each warming light. This model is equipped with LED lighting: (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66"). ⁶ Airflow (CFM) decreases as duct resistance (static pressure) increases. Values at 0.1"–0.3" SP reflect typical installed conditions.