


Professional Wall Mount Hood with Baffle Filter (M-Line)

Professional styling and durable stainless steel construction make this hood ideal for high-output cooking environments. Commercial-style stainless steel baffle filtration delivers robust ventilation performance, with dishwasher-safe filters that simplify routine maintenance. Matching duct covers sold separately.


To view available finishes & accessories please visit ventahood.com/products/PRH18-M54

SPECIFICATIONS


WIDTH	54"
DEPTH	24"
HEIGHT	18"
CFM ¹	See Chart A
LIGHTING	4 LED Prongs 3000K Warm White

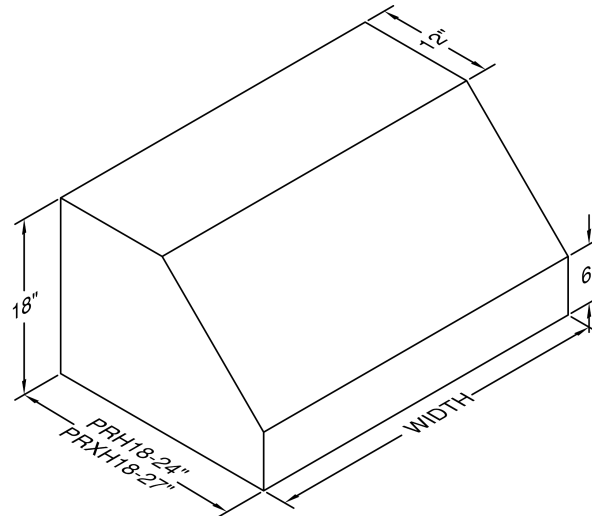

DUCT COVERS




RECOMMENDED MOUNTING HEIGHT

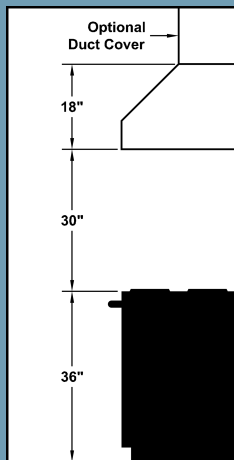


NOTE: Exceeding recommended mounting height may compromise performance.


CONNECTIONS



M600 & M1200 Connection Diagrams



(Side View)



(Front View)

(CHART B) CFM @ 0.1" S.P.

SPEED	M600	WHM300*	M1200
1	240	240	420
2	300	300	645
3	500	-	865
4	625	-	1015

* The WHM300 is a wiring harness that when used with the M600 blower (sold separately) will disable blower speeds exceeding 300 CFM.

(CHART A) ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

MODEL	VOLTS	AMPS	HZ	CFM @ 0.0" SP ²	CFM @ 0.1" SP	CFM @ 0.25" SP	CFM @ 0.5" SP	CFM @ 0.75" SP	MIN. ROUND DUCT SIZE
M600 Single	115	5.0	60	630	625	615	600	580	6" (28sq.in.)
M600 w/WHM300 Harness	115	5.0	60	302	300	295	288	278	6" (28sq.in.)
M1200 Dual	115	10.0	60	1035	1015	1000	995	915	10" (79sq.in.)

¹ CFM (cubic feet per minute) measures airflow. ² Airflow (CFM) decreases as duct resistance (static pressure) increases.