

RBM24F4FXNV

REFRIGERATOR 24" FREESTANDING BOTTOM MOUNT
STAINLESS STEEL FINISH



Energy star rated refrigerator & freezer with 11.4 cu.ft capacity, powered by variable-speed compressor and single evaporator.

Automated defrosting of evaporator ensures food stays always fresh.

Fresco drawer with separate temperature control (27 to 37 °F) and adjustable humidity for optimal storage of meat, cold cuts, shellfish, fish and dairy products.

Three shelves, a metal bottle rack and three door bins ensure food is neatly stored and well-preserved. The freezer compartment features three standard-size drawers, making it easy to retrieve frozen items.

Digital LED touch interface with user-friendly controls for temperature, speed-cooling, speed-freezing, vacation mode and eco mode.

Reversible doors for left or right swing configuration.

Choose Professional or Master Series handle kit to match your other Bertazzoni kitchen appliances.

2 years parts & labor warranty.

PRODUCT FEATURES

Size	W 23 7/16"
Volume	Ref 7.9 cu.ft / Frz 3.5 cu.ft
Door finish	No fingerprint stainless steel
User interface	Internal digital LED touch interface
Lighting	LED on the top
Refrigerator shelves	2 fixed and 1 height-adjustable
Refrigerator drawers	1 + 1 fresco drawer with separate temperature and humidity control
Freezer compartment	3 drawers
Door storage	1 stationary + 2 height-adjustable
Settings	Super cool, Super freeze, Eco mode, Vacation mode, Sabbath mode

TECHNICAL SPECIFICATIONS

Electrical supply	115 V 60 HZ - 175 W - 0.8 Amp
Power connection	NEMA 5-15P with 83"" power cord
Sound rating	39 dbA
Energy consumption	396.0 kwh/yr
Certification	CEC,ETL
Warranty	2 years parts & labor
Packaging dimensions	W 26 3/8" H 75 9/16" D 28 3/4"
Weight	167.0 lbs

ACCESSORIES

PROHK24BM	Handle kit for 24" & 31" bottom mount refrigerator - Professional Series
MASHK24BM	Handle kit for 24" & 31" bottom mount refrigerator - Master Series




RBM24F4FXNV

REFRIGERATOR 24" FREESTANDING BOTTOM MOUNT
STAINLESS STEEL FINISH




PRODUCT DIMENSIONS

SIDE VIEW

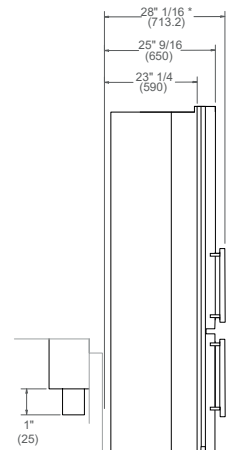


* with MAS handle kit / with PRO handle kit: 27 1/2 (699.2)

FRONT VIEW

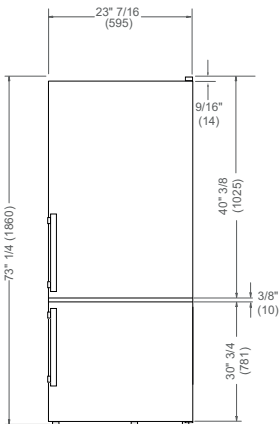


TOP VIEW

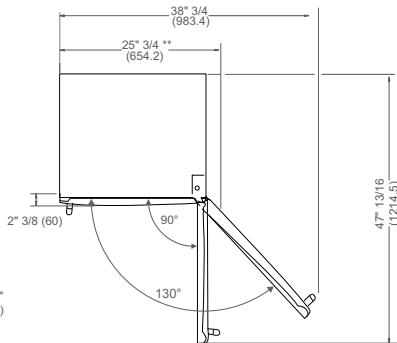

** with MAS handle kit / with PRO handle kit: 25 3/16 (640.2)


CUTOUT DIMENSIONS (Counter-depth Installation)

SIDE VIEW

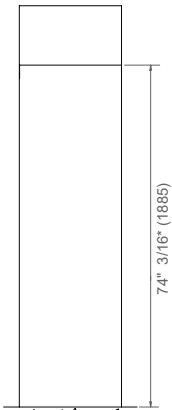


* dimension with a minimum clearance of 1" (25) on the top

FRONT VIEW

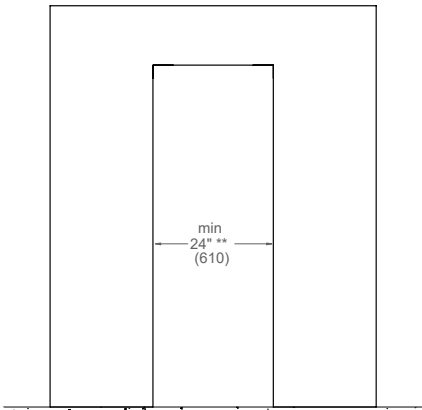

** dimension with a minimum clearance of 5/16" (7.5) on both sides

TOP VIEW



*** dimension with a minimum clearance of 1 3/4" (45) on the back


ELECTRICAL CONNECTION



A properly-grounded, horizontally-mounted electrical receptacle should be installed according to this drawing.

Connection(s) placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



Dimensions in parentheses are millimeters unless otherwise specified.