


# REVERSING DOOR INSTRUCTIONS

## Installation Instructions

### CHANGING THE SIDE ON WHICH THE DOORS OPEN

1. Using a screw driver, remove the right upper hinge cover and hinge.

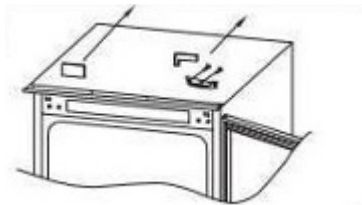

2. Remove the upper door.




3. Remove the middle hinge and its connecting pin underneath.




4. Remove the bottom door.




5. Remove the right bottom hinge and left plastic plugs, and refit them on the opposite sides.

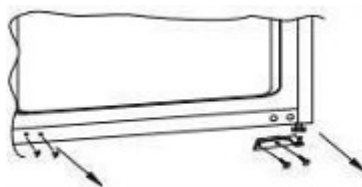

6. Mount the right upper hinge on the left bottom corner and install the cover.

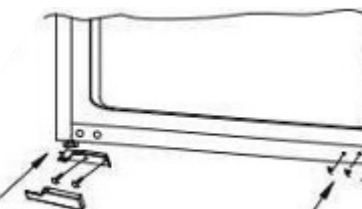

7. Remount the doors and hinges, working from bottom to top (from 1-4).



## Ensuring the door seals correctly

It is normal for the seal to be compressed after the door has been reversed. With the door closed, use a hair dryer to expand the seal and fill the gap between the door and the body of the appliance. Take care not to hold the hair dryer too close to the appliance, which could damage the seal.

A distance of approximately 4" (10cm) should be suitable. When completed, allow the seal and door to cool before touching them. Once done, the seal should remain in position.

The main consideration when installing any refrigeration unit into a fitted kitchen is ventilation. The heat removed from the cooling compartment needs to be dissipated into the air around the appliance. Incorrect ventilation can lead to premature compressor failure, excessive power consumption and total system failure and may invalidate the warranty provided with the appliance.