


Professional Under Cabinet Hood with Emerald-Cut Edges, Low-Profile Blower (V-Line)

Patented emerald-cut edges create a distinctive sculpted silhouette. Powerful Low-Profile blower technology uses centrifugal filtration to quietly capture smoke, grease and cooking vapors. Dishwasher-safe components simplify cleanup.


To view available finishes & accessories please visit ventahood.com/products/SLH6-K36

SPECIFICATIONS

WIDTH	36"
DEPTH	19 1/2"
HEIGHT	6"
CFM ¹	250
EQUIVALENT CFM ²	375
SOUND RATING (HIGH SPEED) ³	7.4 Sones / 58.2 dB
LIGHTING ⁴	2 LED GU10s 3000K Warm White

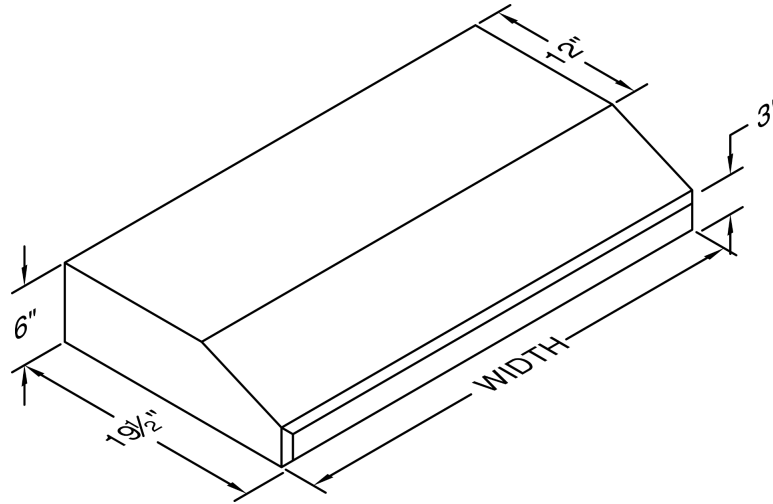


RECOMMENDED MOUNTING HEIGHT

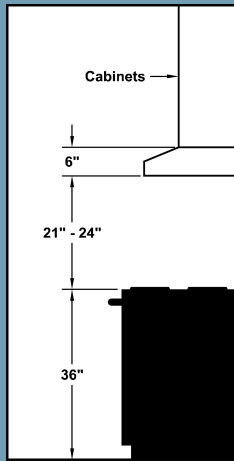


NOTE: Exceeding recommended mounting height may compromise performance.


CONNECTIONS

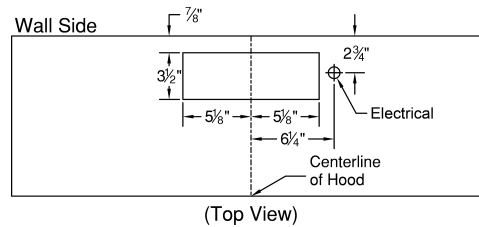

(Top View)

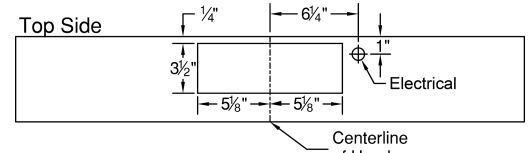

(Wall Cutout, Viewed from Front)



The VP521 transition is available for top vent applications at an additional charge.

ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

MODEL	VOLTS	AMPS	HZ	RPM	CFM @ 0.0" SP ⁵	CFM @ 0.1" SP	CFM @ 0.2" SP	CFM @ 0.3" SP	MIN. ROUND DUCT SIZE
K250 (Top Vent) ARS	115	3.5	60	1550	250	223	220	190	7" (38sq.in.)

¹ CFM (cubic feet per minute) measures airflow. ² Because Magic Lung® blowers use centrifugal filtration instead of traditional baffle or mesh filters, they move air more efficiently. When comparing to other brands, use Equivalent CFM to understand real-world performance. ³ Sones measure perceived loudness—lower values indicate quieter operation. Decibel values shown are approximate equivalents. ⁴ This model is not available with heat lamps. ⁵ Airflow (CFM) decreases as duct resistance (static pressure) increases. Values at 0.1"–0.3" SP reflect typical installed conditions.