

FEATURES & BENEFITS



| | |
|--------------------------|--|
| PERFORMANCE | <ul style="list-style-type: none"> • Volume of 4.7 cu ft holds up to 43 wine bottles (750 ml) • Digital Touch Pad Control is conveniently located on upper face of unit • Temperature range: 34°F - 65°F • Passive cooling system • Rubber mounted compressor virtually eliminates vibration |
| INTERIOR/EXTERIOR | <ul style="list-style-type: none"> • Black interior is illuminated with LED lighting that automatically turns off when the door is closed, or can be set to stay on for 3 hours • Full extension black coated wine racks allow for easy access and prevent bottles from shifting • Wine racks accommodate a variety of bottle shapes and sizes, while the third and sixth racks allow for larger diameter wine and champagne bottles • LowE coated, argon gas filled double thermopane glass door provides protection from harmful UV light • Stainless steel handle (7/8" diameter) • The door swing on non-lock models is field reversible and is shipped right-hand hinged • Lock models must be ordered right-hand or left-hand hinged • Designed to be built-in (galvanized exterior cabinet) |
| INTEGRATION | <ul style="list-style-type: none"> • Robust, concealed and covered hinges with built-in door stop and closer • Integrated model requires 3/4" custom panel of your choice, or can accept U-Line Handleless Stainless Panel Accessory (must be ordered separately) • Fixed grille can accept an integrated toe-kick • Four independently adjustable leveling legs provide a precise undercounter fit |



STAINLESS FRAME



STAINLESS FRAME (LOCK)



INTEGRATED FRAME (STAINLESS HANDLELESS PANEL)*



INTEGRATED FRAME



INTEGRATED SOLID



INTEGRATED SOLID (STAINLESS HANDLELESS PANEL)*

MODEL DETAILS

| Model | Voltage/Hz | Door Swing | Finish | Shipping Weight |
|------------------|------------|-------------------|------------------------|-----------------|
| U-2224ZWCS-00B | 115 / 60 | Field Reversible | Stainless Frame | 160 lb |
| U-2224ZWCS-13B | 115 / 60 | Right-Hand Hinged | Stainless Frame (Lock) | 160 lb |
| U-2224ZWCS-15B | 115 / 60 | Left-Hand Hinged | Stainless Frame (Lock) | 160 lb |
| U-2224ZWCINT-00B | 115 / 60 | Field Reversible | Integrated Frame | 157 lb |
| U-2224ZWCINT-60B | 115 / 60 | Field Reversible | Integrated Solid | 150 lb |


ACCESSORIES

| Model | Description | Finish | Shipping Weight |
|----------------|----------------------------------|-----------|-----------------|
| ULASHP24FRAME* | Stainless Handleless Panel Frame | Stainless | 8 lb |
| ULASHP24SOLID* | Stainless Handleless Panel Solid | Stainless | 12 lb |


*Installs on integrated models.

DIMENSIONS

Dimensions shown apply to all finishes, including Integrated (INT) models with 3/4" integrated panel/frame installed.

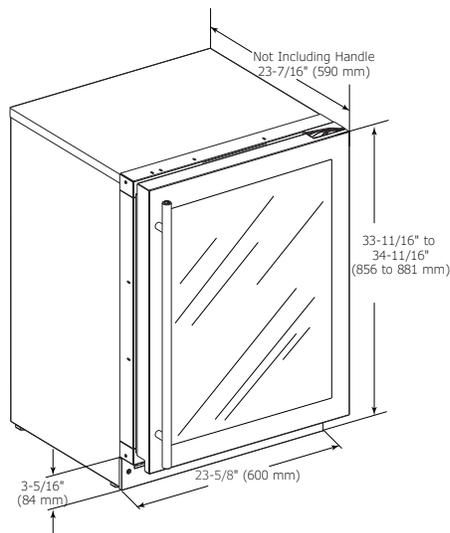

CABINET CUT-OUT

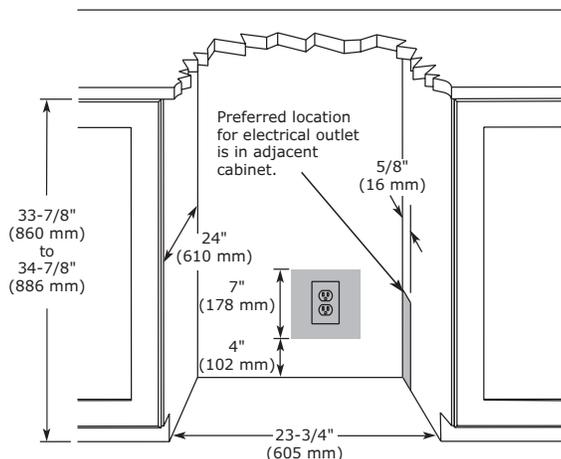

INSTALLATION NOTES

When installing adjacent to wall, ensure 2 1/2" clearance on hinged side for 90° door opening, allowing ample room for door handle.

No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille air flow.

WARRANTY

- 1 Year (parts & labor) / 5 year sealed system (parts)
- + **Additional 1 Year (parts & labor) warranty at no cost with product registration**

See complete warranty for details

SPECIFICATIONS

| | |
|----------------------------------|--|
| Model | 2224ZWC |
| Amps: Running | 1.2 |
| Capacity: Average Volume (cu ft) | 4.7 |
| Capacity: Wine Bottle (750 ml) | 43 |
| Control Type | Digital Touch Pad |
| Dimensions: Product Depth | 23 7/16" / 590 mm |
| Dimensions: Product Height | 33 11/16" / 856 mm |
| Dimensions: Product Width | 23 5/8" / 600 mm |
| ENERGY STAR | N/A |
| Panel Height | 30" / 762 mm |
| Panel Thickness | 3/4" / 20 mm |
| Panel Type | 2 3/4" / 70 mm Frame Panel or Solid Panel (-60 suffix) |
| Panel Width | 23 1/2" / 595 mm |
| Product Weight: Max | 150 lb |
| Refrigerant Type | R600a (1.06 oz) |
| Sabbath (Star K Certified) | Yes |
| Temperature Range | 34°F - 65°F |

COOLING SYSTEM



ELECTRICAL REQUIREMENTS

This unit requires a grounded, polarized 115 VAC, 60 Hz, 15 A power supply (normal household current).

