



**XOU30BWDDGO**

30" PANEL READY COMBO BEVERAGE CENTER  
& WINE COOLER

LIFESTYLE UNDERCOUNTER REFRIGERATION



**XOU30BWDDGO**

- Shelves & Racks Fully Extend While Loaded
- Independantly Controlled Zones
- Tri-Color Led Lighting
- Secure Lock For Each Door


30" PANEL READY UNDERCOUNTER BEVERAGE/WINE COMBO UNIT

THE ULTIMATE IN CONVENIENT ENTERTAINING -YOUR FAVORITE VINTAGES AND ICY COLD BEVERAGES READY TO SERVE, JUST WHERE YOU WANT THEM

Your XO French Door Combo Unit has the ability to store both wine at 41° to 64° F ready to serve and icy cold beverages from 34° to 50° F in the same compact system. Designed to fit undercounter and wherever your life takes you.

WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU

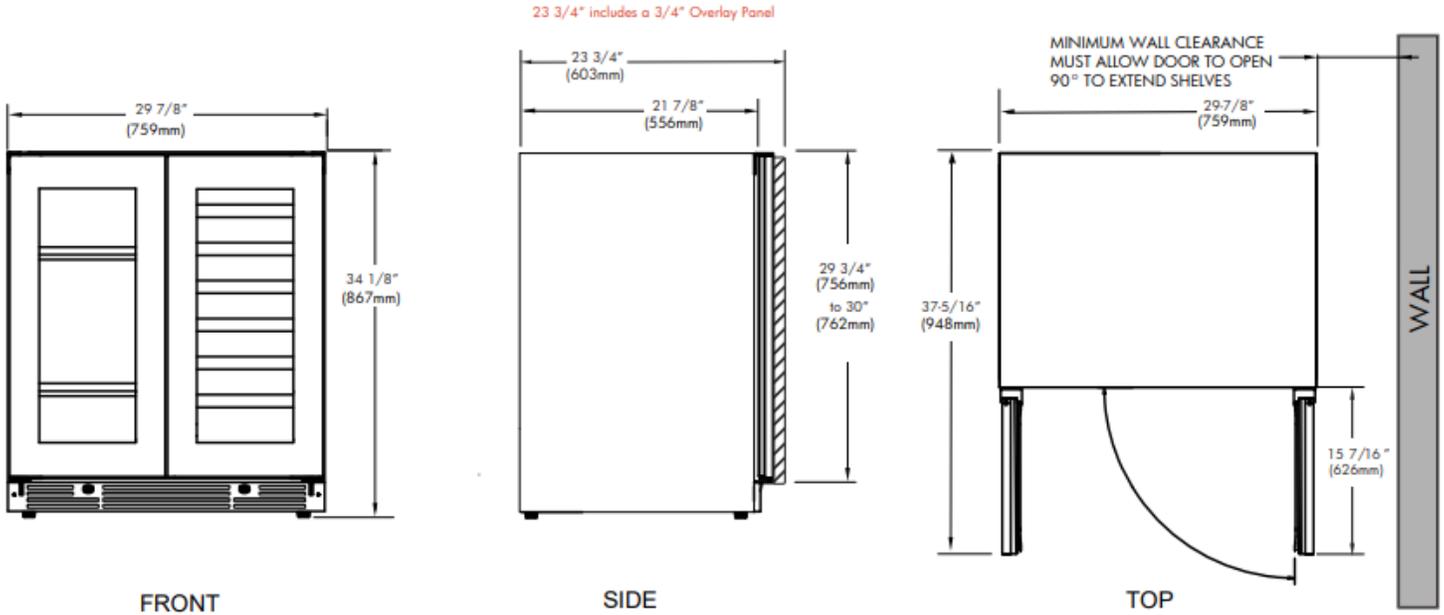

### FEATURES


**CAPACITY** Full extension shelves and racks hold:  
(28) 750ml bottles at 41° to 64°F  
(66) 12oz cans at 34° to 50°F

- FEATURES**
- Zero clearance hinges for flush integration\*
  - Secure door lock
  - Full extension shelves and racks
  - Library quiet 39 dBA operation
  - Elegant tri-color interior illumination
  - Intuitive digital touch controls
  - 6-1/2' Power Cord with low profile 90° flat plug
  - Low E Glass blocks harmful UV light
  - Alarm Functions
  - Energy Saver and Sabbath Mode

\* Note: zero clearance hinges are visible just above and below the door panel

### SPECIFICATIONS


<b>ELECTRICAL</b>	120V 60HZ 4.35 AMP*
<b>DIMENSIONS</b>	H 34 1/8"
	W 29 7/8"
	D 23 3/4" (w 3/4" finish panel)
<b>ROUGH IN</b>	H 34 1/4" min
	W 30"
	D 24"
<b>REFRIGERANT</b>	R600A



Scan the QR Code to see the installation video.




## ROUGH IN DIMENSIONS

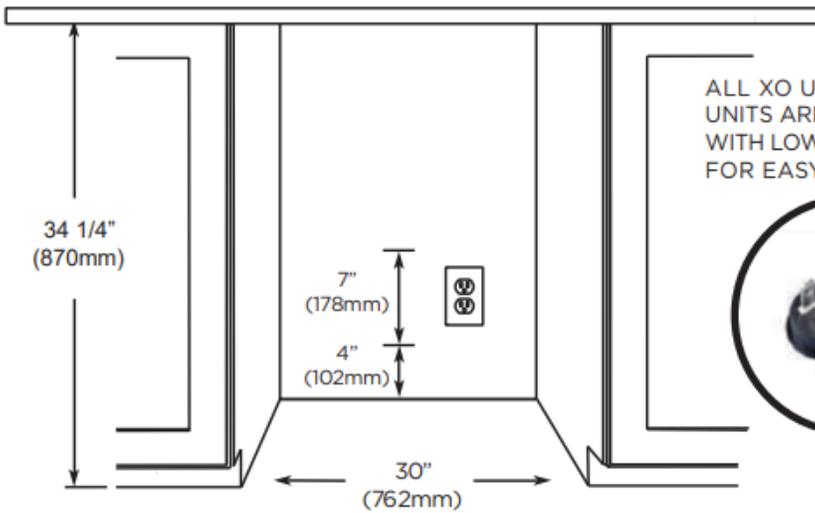



ALL XO UNDERCOUNTER UNITS ARRIVE PRE-WIRED WITH LOW PROFILE PLUGS FOR EASY INSTALLATION



NEED MORE SPACE - CUT INTO AN ADJOINING CABINET TO REACH AN OUTLET THERE




## OVERLAY FRAME DIMENSIONS

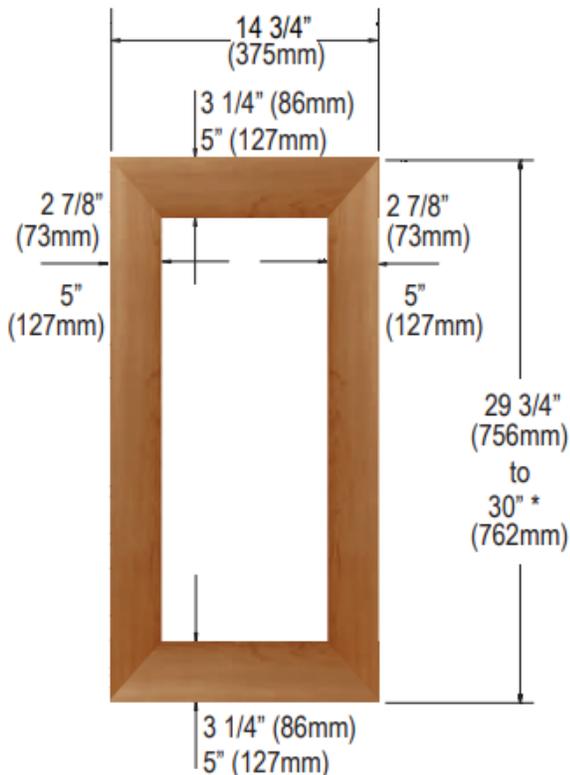

WHEN INSTALLING WITH THE HINGE SIDE NEXT TO A WALL -


LEAVE ENOUGH CLEARANCE GAP FOR CABINET HANDLES

DOOR MUST BE ABLE TO OPEN A MINIMUM OF 90°.



TO ACCOMMODATE THE HINGE PINS ON THE HINGE SIDE OF THE PANEL Drill a hole at least 5/16" in diameter and 1" deep into the top and bottom of the frame in the location shown.

9/16" in from the edge and 7/16" out from the unfinished side facing the door.

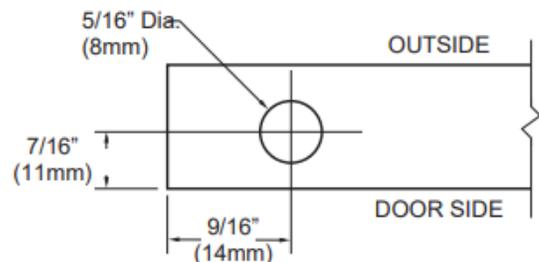

THE DOOR STOP IS SET AT 110° BUT CAN BE RESET TO 90° OR 140°.

IF THE DOOR CANNOT OPEN FULLY YOU CANNOT EXTEND THE RACKS.