


Island Liner Insert with Magic Lung® Blower

Designed for standard ranges and cooktops, this liner insert combines a compact capture profile with patented Magic Lung® technology—using centrifugal filtration to deliver high-performance, ultra-quiet ventilation. SensaSource® automatically adjusts blower speed for enhanced grease control and fire safety, while dishwasher-safe components simplify cleanup.


To view available finishes & accessories please visit ventahood.com/products/TH236SLE

SPECIFICATIONS

WIDTH	36"
DEPTH	27"
HEIGHT	12"
CFM ¹	550
EQUIVALENT CFM ²	900
SOUND RATING (HIGH SPEED) ³	6 Sones / 56.3 dB
LIGHTING ⁴	4 LEDs 2700K Warm White

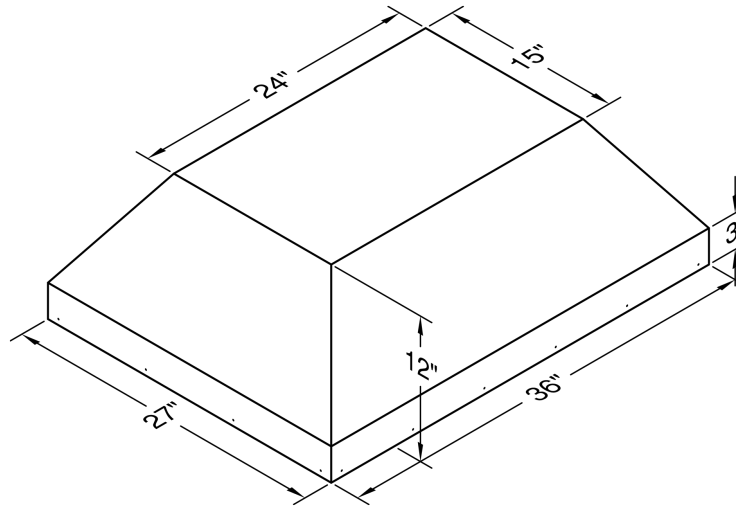


RECOMMENDED MOUNTING HEIGHT

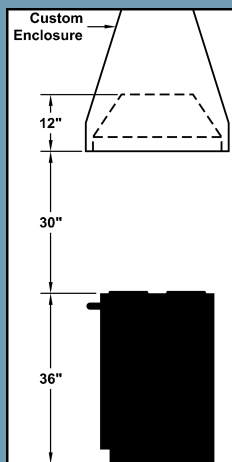


NOTE: Exceeding recommended mounting height may compromise performance.


CONNECTIONS

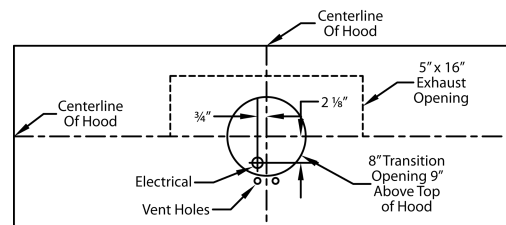

550 CFM T200 Dual Blower (Top View)



Transition Installed (Side View)

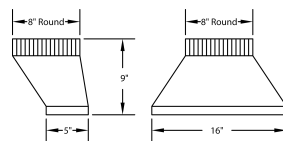

VP565 Standard Transition
(Included)

ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

MODEL	VOLTS	AMPS	HZ	RPM	CFM @ 0.0" SP ⁵	CFM @ 0.1" SP	CFM @ 0.2" SP	CFM @ 0.3" SP	MIN. ROUND DUCT SIZE
T200 Island Dual	115	4.0	60	1550	550	507	471	431	8" (50sq.in.)

¹ CFM (cubic feet per minute) measures airflow. ² Because Magic Lung® blowers use centrifugal filtration instead of traditional baffle or mesh filters, they move air more efficiently. When comparing to other brands, use Equivalent CFM to understand real-world performance. ³ Sones measure perceived loudness—lower values indicate quieter operation. Decibel values shown are approximate equivalents. ⁴ This model is not available with heat lamps. ⁵ Airflow (CFM) decreases as duct resistance (static pressure) increases. Values at 0.1"–0.3" SP reflect typical installed conditions.